

**BEGA****33 367**

Lichtbaustein®



Project · Reference number


Date

## Product data sheet

### Application

**Lichtbaustein®** The cube  
Ceiling and wall luminaire for many lighting tasks.  
Ideal for places where a soft and uniform  
lighting distribution is required

### Product description

Luminaire made of aluminium alloy  
and stainless steel  
Opal glass satin matt  
2 mounting holes  $\varnothing$  5 mm  
Distance apart 70 mm  
1 cable entry for mains supply cable  
up to  $\varnothing$  10,5 mm max.  $3 \times 1,5^{\square}$   
Lampholder terminal  $2.5^{\square}$   
Earth conductor connection  
Lampholder E 14  
Safety class I  
Protection class IP 44  
Protected against granular foreign bodies  
> 1 mm and splash water  
Impact strength IK03  
Protection against mechanical  
impacts < 0.35 joule  
 – Safety mark  
**CE** – Conformity mark  
Weight: 0.75 kg



### Lamp

Luminaire with lampholder E 14  
Lamp output max. 40 W

For this luminaire we recommend the following  
BEGA LED lamps:

**13 552** LED 4 W · 470 lm · frosted · 2700 K  
**13 594** LED 4 W · 470 lm · frosted · 3000 K

Detailed technical and lighting data for the  
lamps can be found in the data sheets on our  
website.

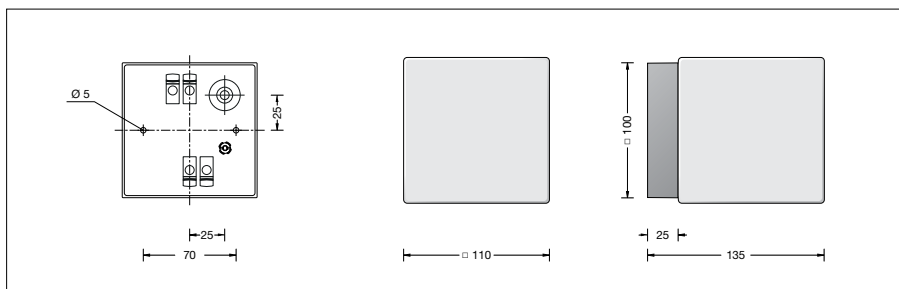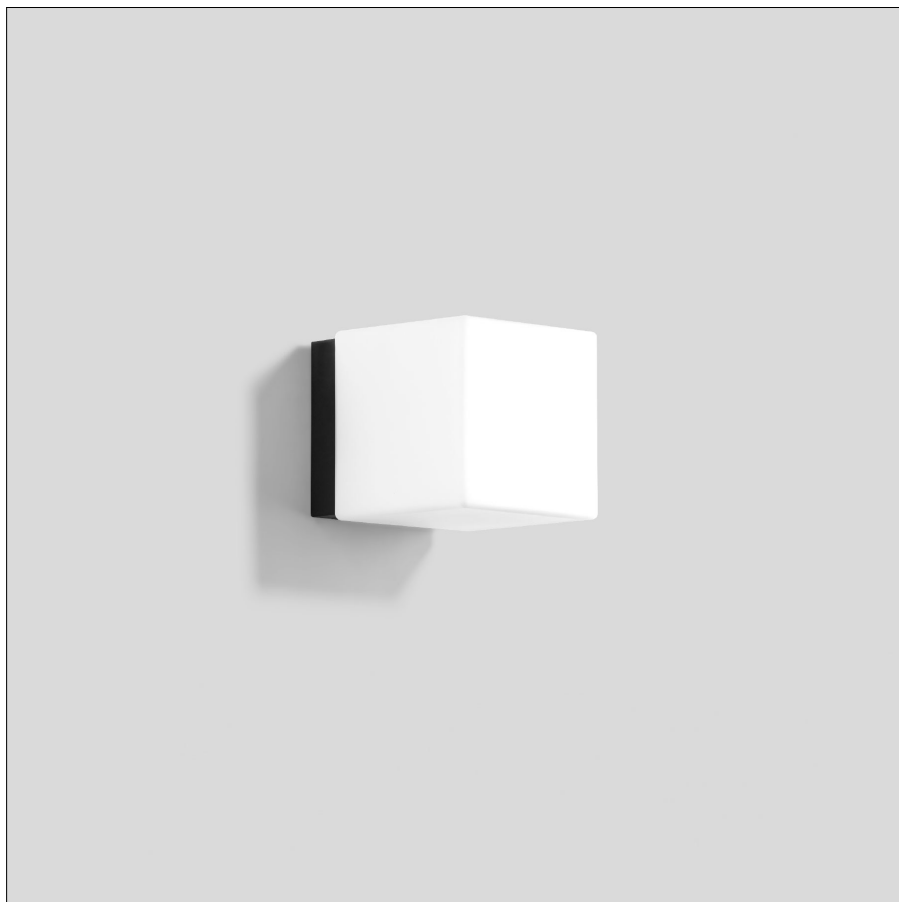

### Light technique

Luminaire data for the light planning program  
DIALux for outdoor lighting, street lighting and  
indoor lighting as well as luminaire data in  
EULUMDAT- and IES-format you will find on the  
BEGA web page [www.bega.com](http://www.bega.com).

### Light distribution

