

BEGA**33 430**

Wall luminaire



Project · Reference number

Date

Product data sheet

Application

Shielded LED wall luminaire with high protection class for a variety of lighting tasks. A luminaire made of die cast aluminium and impact resistant crystal glass.

Product description

Luminaire made of aluminium alloy, aluminium and stainless steel
 Crystal glass with optical structure
 2 mounting holes \varnothing 5.2 mm
 Distance apart 210 mm
 2 cable entries for through-wiring of mains supply cable \varnothing 7-10.5 mm, max. 5 G 1.5[□]
 Connection terminal 2.5[□]
 Earth conductor connection
 LED power supply unit
 220-240 V \sim 0/50-60 Hz
 DC 176-264 V
 DALI controllable
 A basic isolation exists between power cable and control line
 Safety class I
 Protection class IP 65
 Dust-tight and protection against water jets
 Impact strength IK05
 Protection against mechanical impacts < 0.7 joule
 – Safety mark
 – Conformity mark
 Weight: 2.8 kg

Lamp


Module connected wattage	11.6 W
Luminaire connected wattage	13.8 W
Rated temperature	$t_a = 25^\circ\text{C}$
Ambient temperature	$t_{a\text{max}} = 45^\circ\text{C}$

33 430 K3

Module designation	LED-0848/830
Colour temperature	3000 K
Colour rendering index	CRI > 80
Module luminous flux	2255 lm
Luminaire luminous flux	478 lm
Luminaire luminous efficiency	34,6 lm/W

33 430 K4

Module designation	LED-0848/840
Colour temperature	4000 K
Colour rendering index	CRI > 80
Module luminous flux	2320 lm
Luminaire luminous flux	494 lm
Luminaire luminous efficiency	35,8 lm/W

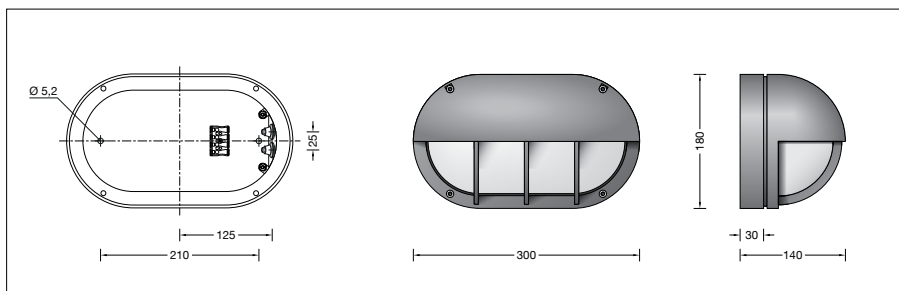

Service life · Ambient temperature

Rated temperature $t_a = 25^\circ\text{C}$	
LED psu:	> 50,000 h
LED module:	> 200,000 h (L80 B50) 100,000 h (L90 B50)

Ambient temperature $t_{a\text{max}} = 45^\circ\text{C}$ (100 %)	
LED psu:	50,000 h
LED module:	93,000 h (L80 B50) 100,000 h (L70 B50)

Ambient temperature $t_{a\text{max}} = 50^\circ\text{C}$ (90 %)	
LED psu:	50,000 h
LED module:	50,000 h

BEGA Thermal Control[®] protects temperature-sensitive luminaire components by temporarily limiting the nominal power at high temperatures.

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Article No. 33 430

LED colour temperature optionally 3000 K or 4000 K
 3000 K – Article number + **K3**
 4000 K – Article number + **K4**

Colour graphite or silver
 graphite – article number
 silver – article number + **A**

Light distribution

