

**BEGA****33 476**

Wall luminaire



Project · Reference number



Date

## Product data sheet

### Application

Shielded wall luminaire with high protection class for a variety of lighting tasks.  
A luminaire made of die cast aluminium and impact resistant crystal glass.  
The luminaire can be installed in any burning position.

### Product description

Luminaire made of aluminium alloy, aluminium and stainless steel  
BEGA Unidure® coating technology  
Crystal glass coated  
2 mounting holes  $\varnothing$  4.5 mm  
Distance apart 210 mm  
2 cable entries for through-wiring of mains supply cable  $\varnothing$  7-10.5 mm  
Connection terminal 2.5<sup>2</sup>  
Earth conductor connection  
Lampholder E 27  
Safety class I  
Protection class IP 65  
Dust-tight and protection against water jets  
Impact strength IK07  
Protection against mechanical impacts < 2 joule  
 – Safety mark  
 – Conformity mark  
Weight: 2.5 kg

### Lamp

Luminaire with lampholder E 27  
Lamp output max. 60 W

For this luminaire we recommend the following BEGA LED lamps:

**13510** LED 7 W · 805 lm · 2700 K

**13548** LED 7 W · 805 lm · 2700 K  
dimnable

**13584** LED 7 W · 805 lm · 3000 K

**13586** LED 7 W · 805 lm · 3000 K  
dimnable

**13512** LED 8 W · 1055 lm · 2700 K

**13564** LED 12 W · 1400 lm · 2700 K

**13565** LED 12 W · 1400 lm · 2700 K  
dimnable

**13588** LED 8 W · 1055 lm · 3000 K

**13590** LED 12 W · 1400 lm · 3000 K

**13592** LED 12 W · 1400 lm · 3000 K  
dimnable

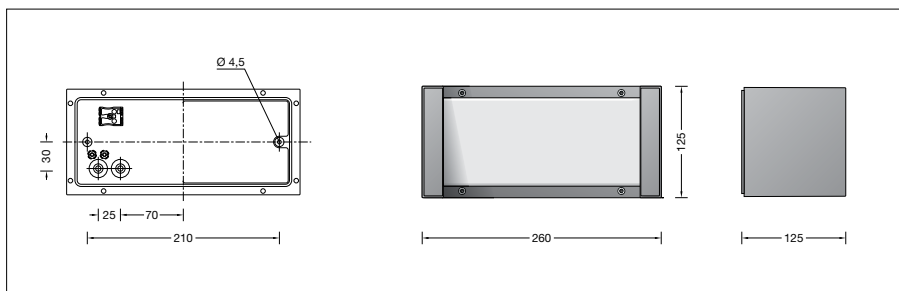
Radio-controlled version (Zigbee 3.0):

**13555** LED 9 W · 805 lm · 2700 K  
dimnable

**13556** LED 9 W · 805 lm · 2700-6500 K  
dimnable · tunable white

**13557** LED 9.5 W · 805 lm · 2700-6500 K  
dimnable · tunable white · RGBW

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.



### Article No. 33 476

Colour graphite or silver  
graphite – article number  
silver – article number + **A**