

BEGA**34 021.2**

Ceiling luminaire for indoor use



Project · Reference number

Date

Product data sheet

Application

Ceiling mounted LED luminaire · indoor luminaire with handblown opal glass, satin matt and aluminium housing, for all lighting tasks in interior applications.

They are ideal for places where a soft and uniform lighting distribution is required.

Product description

Luminaire made of aluminium, finish stainless steel

Opal glass, satin matt, with screw neck

Silicone gasket

2 mounting holes \varnothing 5.5 mm

Distance apart 144 mm

2 cable entries for through-wiring of mains supply cable \varnothing 7-10.5 mm, max. 5G1.5[□]

Connecting terminal and

earth conductor terminal 2.5[□]

Connecting terminal for digital control

LED power supply unit

220-240 V \sim 0/50-60 Hz

DALI controllable

A basic isolation exists between power cable and control line

Safety class I

– Safety mark

CE – Conformity mark

Weight: 1.6 kg

Inrush current

Inrush current: 24 A / 115 μ s

Maximum number of luminaires of this type per miniature circuit breaker:

B10A: 31 luminaires

B16A: 51 luminaires

C10A: 53 luminaires

C16A: 86 luminaires

Lamp

Module connected wattage 13.5 W

Luminaire connected wattage 17 W

Rated temperature $t_a = 25$ °C

Ambient temperature $t_{a \max} = 45$ °C

34 021.2 K3

Module designation LED-0328/930

Colour temperature 3000 K

Colour rendering index CRI >90

Module luminous flux 2190 lm

Luminaire luminous flux 1266 lm

Luminaire luminous efficiency 74,5 lm/W

34 021.2 K4

Module designation LED-0328/940


Colour temperature 4000 K

Colour rendering index CRI >90

Module luminous flux 2320 lm

Luminaire luminous flux 1305 lm

Luminaire luminous efficiency 76,8 lm/W

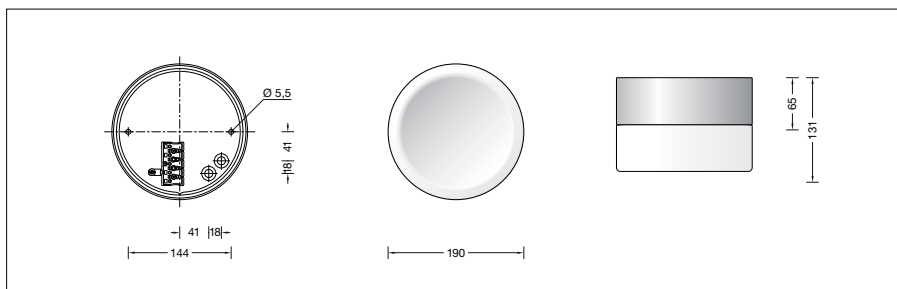

Service life of the LED

Ambient temperature $t_a = 25$ °C

– at > 500,000h: L70B50

max. ambient temperature $t_a = 45$ °C

– at 148,000h: L70B50

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Article No. 34 021.2

LED colour temperature optionally 3000K or 4000K

3000 K – Article number + **K3**

4000 K – Article number + **K4**

Optional finishes

- White enamel code number **.1**
- Stainless steel code number **.2**
- Polished aluminium code number **.3**