

GLASHÜTTE LIMBURG**Product data sheet****Ceiling and wall luminaire****34 067.1**

Project · Reference number

Date

Application

LED Large-area luminaire with high light power and high uniform light distribution.

Product description

Luminaire housing made of aluminium
 Finish white enamel
 Crystal glass, inside white
 Silicone gasket
 4 cable entries for through-wiring for mains cable up to \varnothing 11 mm max. $5 \times 1.5^{\square}$
 Connecting terminal 2.5^{\square}
 Earth conductor connection
 2-pole connecting terminal for digital control
 LED power supply unit
 220-240 V \sim 50-60 Hz
 DALI controllable
 A basic isolation exists between power cable and control line
 Safety class I
CE – Conformity mark
 Weight: 22.4 kg

Lamp

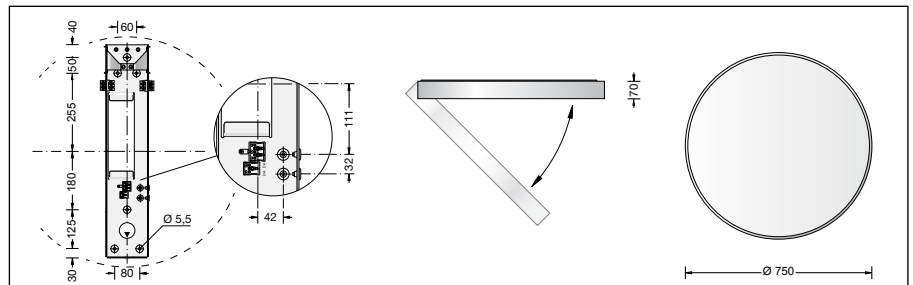
Module connected wattage	184 W
Luminaire connected wattage	220 W
Rated temperature	$t_a = 25^{\circ}\text{C}$
Ambient temperature	$t_{a\text{max}} = 25^{\circ}\text{C}$

34 067.1

Module designation	8x LED-0470/830
Colour temperature	3000 K
Colour rendering index	$R_a > 80$
Module luminous flux	19320 lm
Luminaire luminous flux	10406 lm
Luminaire luminous efficiency	47,3 lm/W

34 067.1 K4

Module designation	8x LED-0470/840
Colour temperature	4000 K
Colour rendering index	$R_a > 80$
Module luminous flux	20400 lm
Luminaire luminous flux	10987 lm
Luminaire luminous efficiency	49,9 lm/W


www.glashuette-limburg.com
**Lifetime of the LED**

Ambient temperature $t_a = 15^{\circ}\text{C}$

- at 50,000h: L70B10
- at 68,000h: L70B50

max. ambient temperature $t_a = 25^{\circ}\text{C}$

- at 50,000h: L70B10
- at 63,000h: L70B50

Article No. 34 067.1

Colour temperature 3000 K.

Also available with 4000 K on request.

3000 K – article number

4000 K – article number + **K4**

Finish options

- Enamel, white
- Stainless steel
- Chrome

Code number **.1**

Code number **.2**

Code number **.3**