

GLASHÜTTE LIMBURG**Product data sheet****Ceiling and wall luminaire****34 067.2**

Project · Reference number

Date

Application

LED Large-area luminaire with high light power and high uniform light distribution.

Product description

Luminaire housing made of aluminium
stainless steel finish
Crystal glass, inside white
Silicone gasket
4 cable entries for through-wiring for mains cable up to \varnothing 11 mm max. $5 \times 1.5^{\square}$
Connecting terminal 2.5^{\square}
Earth conductor connection
2-pole connecting terminal for digital control
LED power supply unit
220-240 V \sim 50-60 Hz
DALI controllable
A basic isolation exists between power cable and control line
Safety class I
CE – Conformity mark
Weight: 22.4 kg

Lamp

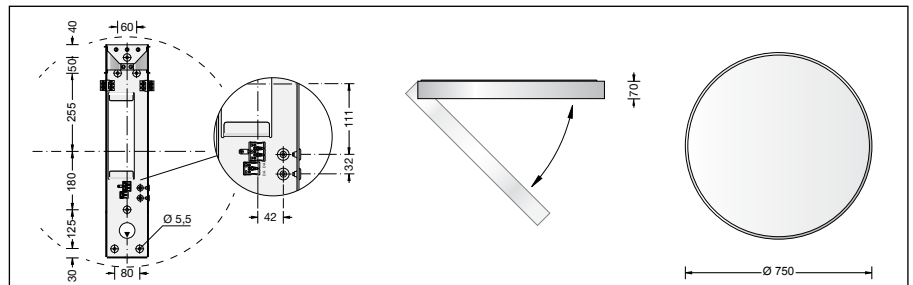
Module connected wattage	200 W
Luminaire connected wattage	220 W
Rated temperature	$t_a = 25^{\circ}\text{C}$
Ambient temperature	$t_{a\text{max}} = 25^{\circ}\text{C}$

34 067.2

Module designation	8x LED-0470/830
Colour temperature	3000 K
Colour rendering index	$R_a > 80$
Module luminous flux	19320 lm
Luminaire luminous flux	10406 lm
Luminaire luminous efficiency	47,3 lm/W

34 067.2 K4

Module designation	8x LED-0470/840
Colour temperature	4000 K
Colour rendering index	$R_a > 80$
Module luminous flux	20400 lm
Luminaire luminous flux	10987 lm
Luminaire luminous efficiency	49,9 lm/W


www.glashuette-limborg.com
**Lifetime of the LED**

Ambient temperature $t_a = 15^{\circ}\text{C}$

- at 50,000h: L70B10
- at 68,000h: L70B50

max. ambient temperature $t_a = 25^{\circ}\text{C}$

- at 50,000h: L70B10
- at 63,000h: L70B50

Article No. 34 067.2

Colour temperature 3000 K.

Also available with 4000 K on request.

3000 K – article number

4000 K – article number + **K4**

Finish options

- Enamel, white
- Stainless steel
- Chrome

Code number **.1**

Code number **.2**

Code number **.3**