

Project · Reference number

Date

Product data sheet

Application

Ceiling and wall luminaire · indoor luminaire made of impact resistant synthetic diffuser and metal housing, for all lighting tasks. They are ideal for places where a soft and uniform lighting distribution is required.

Product description

Metal housing, finish white aluminium enamel RAL 9006
Impact resistant synthetic diffuser, white, with sliding-bolt closure
2 mounting holes \varnothing 5.5 mm
Distance apart 200 mm
2 cable entries for through-wiring for mains cable up to \varnothing 10,5 mm max. 5 x 1.5[□]
Connecting terminal 2.5[□] with plug connection
Earth conductor connection
2-pole connection DA DA for digital control
LED power supply unit
220-240 V \sphericalangle 0/50-60 Hz
DALI controllable
A basic isolation exists between power cable and control line
Safety class I
Protection class IP 44
Protected against granular foreign bodies > 1 mm and splash water
CE – Conformity mark
Weight: 3.1 kg

Inrush current

Inrush current: 5 A / 50 μ s
Maximum number of luminaires of this type per miniature circuit breaker:
B10A: 31 luminaires
B16A: 50 luminaires
C10A: 52 luminaires
C16A: 85 luminaires

Lamp

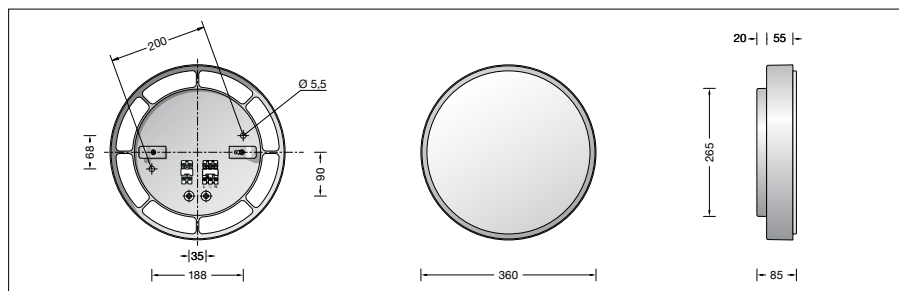
Module connected wattage 16.4 W
Luminaire connected wattage 19.5 W
Rated temperature $t_a = 25$ °C
Ambient temperature $t_{a \text{ max}} = 35$ °C

34 278.2 P K3

Module designation LED-0569/930
Colour temperature 3000 K
Colour rendering index CRI > 90
Module luminous flux 2050 lm
Luminaire luminous flux 1638 lm
Luminaire luminous efficiency 84 lm/W

34 278.2 P K4

Module designation LED-0569/940
Colour temperature 4000 K
Colour rendering index CRI > 90
Module luminous flux 2125 lm
Luminaire luminous flux 1698 lm
Luminaire luminous efficiency 87,1 lm/W

**Lifetime of the LED**

Ambient temperature $t_a = 25$ °C
– at 267,000h: L70B50
max. ambient temperature $t_a = 35$ °C
– at 146,000h: L70B50

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Article No. 34 278.2 P

LED colour temperature optionally 3000K or 4000K
3000 K – Article number + **K3**
4000 K – Article number + **K4**

Finish options

- Enamel, white Code number **.1**
- Enamel, white aluminium Code number **.2**