

GLASHÜTTE LIMBURG**Product data sheet****Ceiling and wall luminaire****IP 44****3279 P**

Project · Reference number

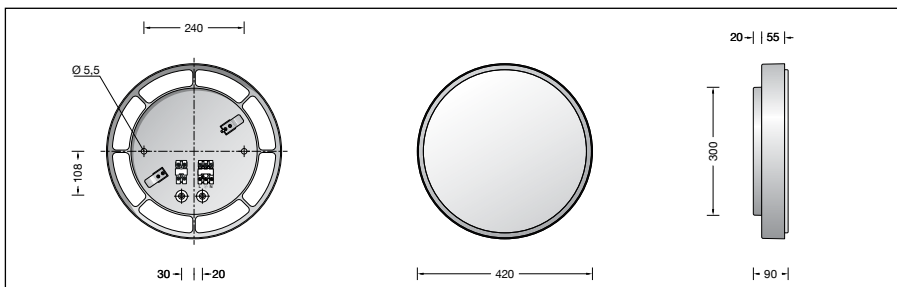
Date

Application

Ceiling and wall luminaire made of impact resistant synthetic diffuser and metal housing, for all lighting tasks in interior applications. They are ideal for places where a soft and uniform lighting distribution is required. High operating efficiency because of long maintenance intervals and high light output with low connected load.

Product description

Metal housing,
finish white enamel
Impact resistant synthetic diffuser, white,
with sliding-bolt closure
2 fixing holes \varnothing 5.5 mm
240 mm spacing
2 cable entries for through-wiring for mains
cable up to \varnothing 10,5 mm max. 5 x 1.5[□]
Plug connection
Connecting terminal 2.5[□]
Earth conductor connection
2-pole connecting terminal for
digital control
LED power supply unit
220-240 V \sim 0/50-60 Hz
DALI controllable
Safety class I
Protection class IP 44
Protected against granular foreign bodies
> 1 mm and splash water
CE – Conformity mark


www.glashuette-limburg.com
**Lamp**

Module connected wattage 27 W
Luminaire connected wattage 30.5 W
Rated temperature $t_a = 25^\circ\text{C}$
Service life criteria 50 000 h/L₇₀

Article No. 3279P

Colour temperature 3000 K.
Also available with 4000 K on request.
3000 K – article number
4000 K – article number + **K4**

3279 P

Module designation LED-0570/830
Colour temperature 3000 K
Colour rendering index $R_a > 80$
Module luminous flux 3390 lm

3279 P K4

Module designation LED-0570/840
Colour temperature 4000 K
Colour rendering index $R_a > 80$
Module luminous flux 3390 lm