

**BEGA****34 628.1**

Wall luminaire for indoor use



Project · Reference number

Date

## Product data sheet

### Application

Wall luminaire · indoor luminaire with hand-blown, satin matt opal glass.

The character of the three-ply opal glass creates a smooth and uniform light distribution in the room.

### Product description

Die-cast aluminium and aluminium housing, finish white enamel

Hand-blown opal glass, satin matt

4 mounting holes  $\varnothing$  5 mm

Distance 240 x 65 mm

1 cable entry for mains supply cable


up to  $\varnothing$  10.5 mm max. 3 x 1.5<sup>□</sup>

Connection terminal 2.5<sup>□</sup>

Earth conductor connection

Lampholder E 14

Safety class I



 – Safety mark

**CE** – Conformity mark

Weight: 0.8 kg

### Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page [www.bega.com](http://www.bega.com).

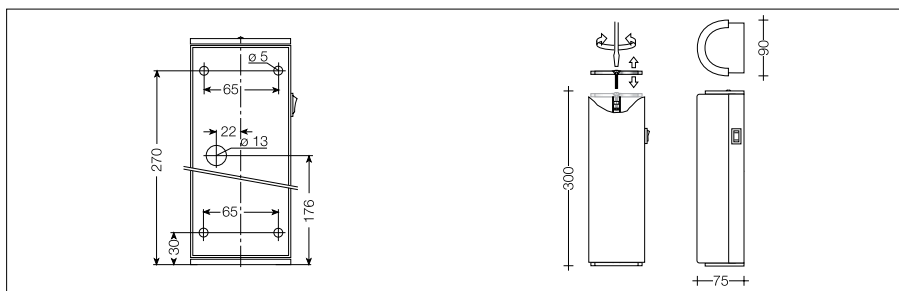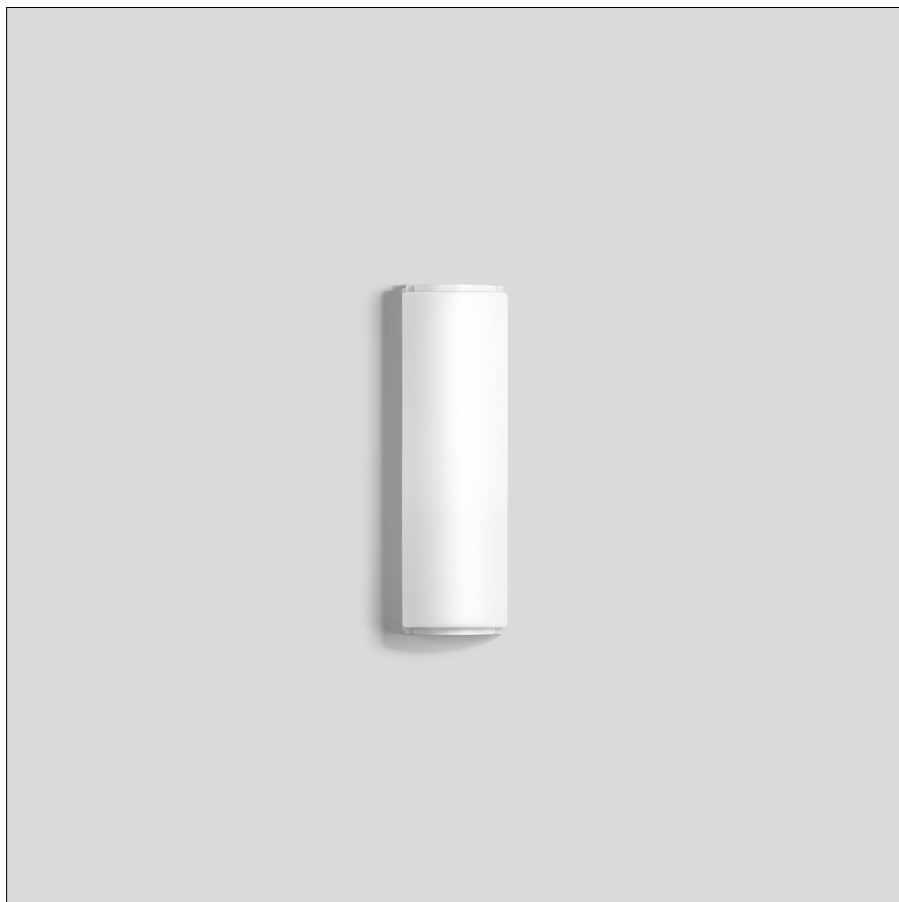

### Lamp

Luminaire with lampholder E 14

Lamp wattage max. 2 x 40 W

High voltage tungsten halogen lamp QD 45 · E 14

Osram: Eco Pro Classic 30 W      405 lm

Philips: Eco Classic 28 W P45      370 lm

Please note the lamp manufacturers' operating instructions.