

BEGA**44 004**

Wall luminaire



Project · Reference number

Date

Product data sheet

Application

Wall luminaire made of stainless steel and hand-blown opal glass.

A luminaire shielded to the top for a host of lighting applications in interior and exterior design.

Product description

Luminaire back housing made of aluminium alloy

Surround made of stainless steel

Steel grade no. 1.4301

Opal glass

2 mounting holes \varnothing 5 mm

Distance apart 70 mm

1 cable entry for mains supply cable

up to \varnothing 10,5 mm max. $3 \times 1,5$

Lampholder terminal 2.5

Earth conductor connection


Lampholder E 27


Safety class I

Protection class IP 44

Protected against granular foreign bodies

> 1 mm and splash water

 – Safety mark

 – Conformity mark

Weight: 2.4 kg

Lamps

Luminaire with lampholder E 27

Lamp output max. 75 W

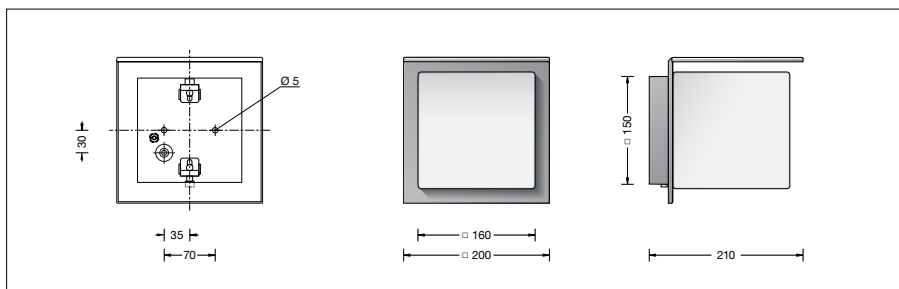
For this luminaire we recommend the following BEGA LED lamps:

13510 LED 7 W · 805 lm · 2700 K

13548 LED 7 W · 805 lm · 2700 K
dimmmable

13512 LED 8 W · 1055 lm · 2700 K

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.



Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Light distribution

