

BEGA**44 573**

Wall washer



Project · Reference number

Date



Product data sheet

Application

LED wall washer with symmetrical light distribution for lighting walls, ceilings and floor spaces.

The luminaire can be installed in any burning position.



Product description

Luminaire made of aluminium alloy, aluminium and stainless steel
 Safety glass with optical structure
 Silicone gasket
 Reflector made of pure anodised aluminium
 Mounting bar with 2 elongated holes
 7 mm width, 430 mm spacing
 2 cable entries for through-wiring of mains supply cable \varnothing 7-10.5 mm, max. 5 G 1.5[□]
 Connecting terminal 2.5[□] with plug connection
 Earth conductor connection
 LED power supply unit
 220-240 V \sim 0/50-60 Hz
 DC 176-280 V
 DALI controllable
 A basic isolation exists between power cable and control line
 Safety class I
 Protection class IP 65
 Dust-tight and protection against water jets
 Impact strength IK07
 Protection against mechanical impacts < 2 joule
 – Safety mark
 – Conformity mark
 Weight: 3.5 kg

Inrush current

Inrush current: 5 A / 50 μ s
 Maximum number of luminaires of this type per miniature circuit breaker:
 B10A: 31 luminaires
 B16A: 50 luminaires
 C10A: 52 luminaires
 C16A: 85 luminaires

Light distribution

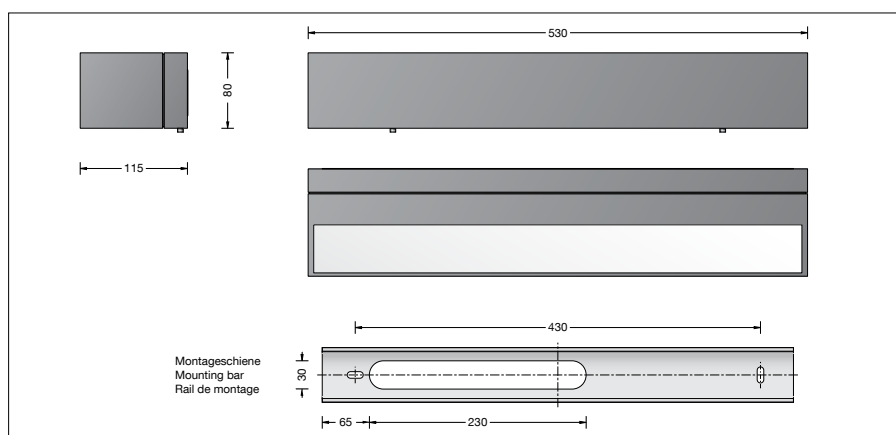

Lamp

Module connected wattage	19.8 W
Luminaire connected wattage	24 W
Rated temperature	$t_a = 25\text{ °C}$
Ambient temperature	$t_{a\text{ max}} = 50\text{ °C}$

44 573 K3

Module designation	LED-0351/830
Colour temperature	3000 K
Colour rendering index	CRI > 80
Module luminous flux	1835 lm
Luminaire luminous flux	1344 lm
Luminaire luminous efficiency	56 lm/W

44 573 K4

Module designation	LED-0351/840
Colour temperature	4000 K
Colour rendering index	CRI > 80
Module luminous flux	2185 lm
Luminaire luminous flux	1600 lm
Luminaire luminous efficiency	66,7 lm/W

Service life of the LED

Ambient temperature $t_a = 25\text{ °C}$
 – at 69,000h: L70B50

max. ambient temperature $t_a = 50\text{ °C}$
 – at 54,000h: L70B50

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Article No. 44 573

LED colour temperature optionally 3000 K or 4000 K
 3000 K – Article number + **K3**
 4000 K – Article number + **K4**

Colour graphite or silver
 graphite – article number
 silver – article number + **A**