BEGA

Ceiling · Wall · Pillar luminaire

Project · Reference number

Product data sheet

Application

Unshielded luminaire for installation under ceilings, on walls as well as on pillars and murals. By means of the three-ply opal glass the light is distributed softly and uniformly over the glass surface.

Product description

Luminaire made of aluminium alloy and stainless steel BEGA Unidure® coating technology Opal glass with screw neck 2 mounting holes ø 6 mm Distance apart 65 mm 2 cable entries for through-wiring of mains supply cable ø 7-10.5 mm Connection terminal 2.5[□] Earth conductor connection Lampholder E 27 Safety class I Protection class IP 65 Dust-tight and protection against water jets Impact strength IK02 Protection against mechanical impacts < 0.2 joule 🛣 10 👜 – Safety mark **CE** – Conformity mark Weight: 2.3 kg

Lamp

Luminaire with lampholder E 27 Lamp output max. 100 W

For this luminaire we recommend the following BEGA LED lamps:

13510	LED 7 W · 805 lm · 2700 K
13 548	LED 7 W · 805 lm · 2700 K
	dimmable

13 584 LED 7 W · 805 lm · 3000 K **13 586** LED 7 W · 805 lm · 3000 K dimmable

13512	LED 8 W · 1055 lm · 2700 K
13564	LED 12 W · 1400 lm · 2700 K
13 565	LED 12 W · 1400 lm · 2700 K
	dimmable

13 588	LED 8 W · 1055 lm · 3000 K
13 590	LED 12 W · 1400 lm · 3000 K
13 592	LED 12 W · 1400 lm · 3000 K
	dimmable


Radio-controlled version (Zigbee 3.0):


13 555	LED 9 W · 805 lm · 2700 K
	dimmable

- **13 556** LED 9 W · 805 lm · 2700 6500 K dimmable · tunable white
- **13557** LED 9.5 W · 805 lm · 2700 6500 K dimmable · tunable white · RGBW

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

Date

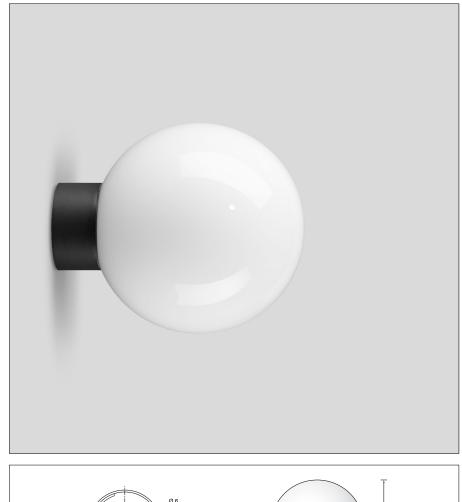

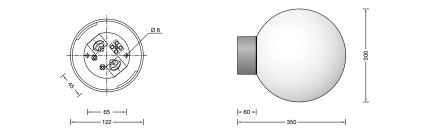

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com. 44 769

(10 🖄 IP 65