

GLASHÜTTE LIMBURG

Product data sheet

Ceiling and wall luminaire

50 022 P

Project · Reference number

Date

Application

Ceiling and wall luminaire made of impact resistant synthetic diffuser and metal housing, for all lighting tasks in interior applications. They are ideal for places where a soft and uniform lighting distribution is required. The used LED technique offers durability and optimal light output with low power consumption at the same time. Luminaire with HF-motion sensor and group module (Master).

Product description

Metal housing,
finish white enamel
Impact resistant synthetic diffuser, white,
with bayonet closure
Integrated HF-motion sensor,
maximum range 10 m
Integrated group module,
maximum range 30 m
2 fixing holes \varnothing 5.5 mm
230 mm spacing
2 cable entries for through-wiring for mains
cable up to \varnothing 10.5 mm max. $3 \times 1.5^{\square}$
Connecting terminal 2.5 $^{\square}$
Earth conductor connection
LED power supply unit
230 V \sim 50 Hz
Safety class I
CE – Conformity mark

Lamp

Module connected wattage	26.9 W
Luminaire connected wattage	31.6 W
Rated temperature	$t_a = 25^{\circ}\text{C}$
Service life criteria	50 000 h/L ₇₀

50 022 P

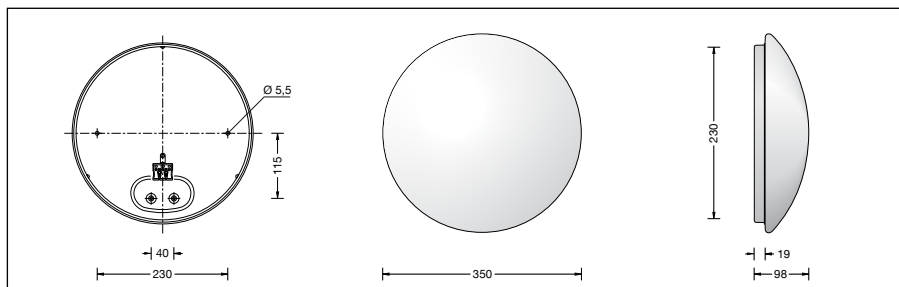
Module designation	LED-0548/830
Colour temperature	3000 K
Colour rendering index	$R_a > 80$
Module luminous flux	3725 lm
Luminaire luminous flux	2438 lm
Luminaire luminous efficiency	77,2 lm/W

50 022 P K2

Module designation	LED-0548/827
Colour temperature	2700 K
Colour rendering index	$R_a > 80$
Module luminous flux	3140 lm
Luminaire luminous flux	2055 lm
Luminaire luminous efficiency	65 lm/W

50 022 P K4

Module designation	LED-0548/840
Colour temperature	4000 K
Colour rendering index	$R_a > 80$
Module luminous flux	3725 lm
Luminaire luminous efficiency	77,2 lm/W

**Accessory · Trim rings**

For this luminaire metal trim rings in 3 enamel surfaces are optional available. Trim rings are accessories and must be ordered separately.

Article No. 50 022 P

Colour temperature 3000 K. Also available with 2700 K or 4000 K on request.

3000 K – article number
2700 K – article number + **K2**
4000 K – article number + **K4**

Part. No

13 004Finish enamel **white****13 005**Finish enamel **palladium****13 006**Finish enamel **glossy silver**