

GLASHÜTTE LIMBURG**Product data sheet****Ceiling and wall luminaire****IP 44****50 110**

Project · Reference number

Date

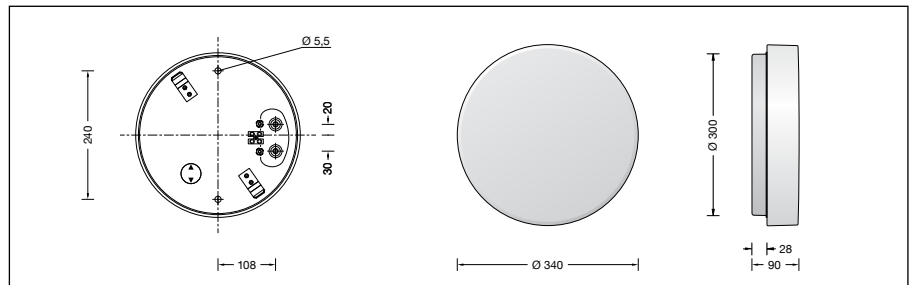
Application

Ceiling and wall luminaire made of hand-blown opal glass, satin matt and metal housing, for all lighting tasks in interior applications.

They are ideal for places where a soft and uniform lighting distribution is required. Luminaire with a high protection class.

Product description

Metal housing,
finish white enamel
Hand-blown opal glass, satin matt,
with sliding-bolt closure
2 fixing holes \varnothing 5.5 mm
240 mm spacing
2 cable entries for through-wiring for mains
cable up to \varnothing 10.5 mm max. 3×1.5 [□]
Connecting terminal 2.5[□]
Earth conductor connection
Lampholder GX 24 q-3
Electronic ballast (EEI=A2)
220-240 V \sim 0/50-60 Hz
DC 176-280 V
DC Start \geq 198 V
Safety class I
Protection class IP 44
Protected against granular foreign bodies
> 1 mm and splash water
CE – Conformity mark
Weight: 2.7 kg


www.glashuette-limburg.com
**Lamps**

2 Compact fluorescent lamps
TC-TELI 26 W · GX 24 q-3

Osram: Dulux T/E... 26 W 1800 lm
Philips: PL-T TOP 26 W / 4p 1800 lm

Please note the lamp manufacturers' operating instructions.

Accessory · Trim rings

For this luminaire metal trim rings in 3 surfaces are optional available. Trim rings are accessories and must be ordered separately.

Item	Part. No
Enamel white	13 079
Stainless steel	13 080
Chrome	13 081