

**BEGA****50 125.2**

Wall luminaire for indoor use



Project · Reference number

Date

## Product data sheet

### Application

Free-radiating wall LED wall luminaire · indoor luminaire made of hand-blown opal glass, satin matt and metal housing.

The character of the three-ply opal glass creates a smooth and uniform light distribution in the room.

### Product description


Metal housing, stainless steel finish  
 Hand-blown opal glass, satin matt  
 Mounting plate with 2 fixing holes  $\varnothing$  6 mm · 70 mm spacing  
 1 cable entry for mains supply cable up to  $\varnothing$  10.5 mm max. 3 x 1.5<sup>□</sup>  
 Connection terminal 2.5<sup>□</sup>  
 Earth conductor connection  
 LED-Module for mains voltage  
 220-230 V  $\sim$  50/60 Hz  
 Safety class I  
 – Safety mark  
**CE** – Conformity mark  
 Weight: 0.85 kg

### Lamp

Luminaire connected wattage 12 W  
 Rated temperature  $t_a = 25$  °C  
 Service life criteria 50 000 h / L<sub>70</sub>

### 50 125.2 K3

Module designation LED-0607/830  
 Colour temperature 3000 K  
 Colour rendering index  $R_a > 80$   
 Module luminous flux 1080 lm  
 Luminaire luminous flux 789 lm  
 Luminaire luminous efficiency 65,8 lm/W

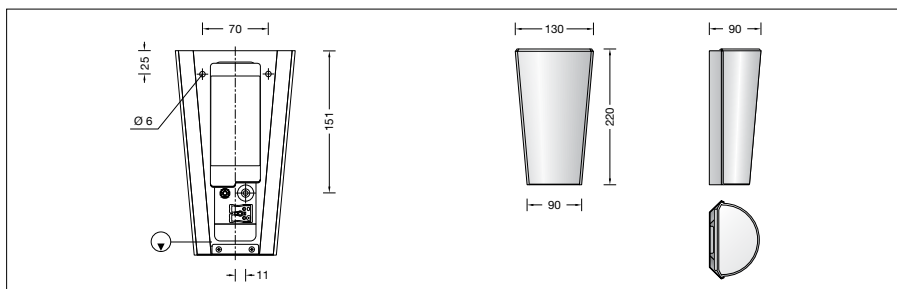

### Article No. 50 125.2

Optional finishes

- White enamel code number **.1**
- Stainless steel code number **.2**
- Chrome code number **.3**
- Brass code number **.4**