

BEGA**50 126.2**

Wall luminaire for indoor use



Project · Reference number

Date



Product data sheet

Application

Free-radiating wall LED wall luminaire · indoor luminaire made of hand-blown opal glass, satin matt and metal housing.

The character of the three-ply opal glass creates a smooth and uniform light distribution in the room.

Product description


Metal housing, stainless steel finish
 Hand-blown opal glass, satin matt
 Mounting plate with 2 fixing holes \varnothing 6 mm · 74 mm spacing
 1 cable entry for mains supply cable up to \varnothing 10.5 mm max. 3 x 1.5[□]
 Connection terminal 2.5[□]
 Earth conductor connection
 LED-Module for mains voltage
 220-230 V \sim 50/60 Hz
 Safety class I
 – Safety mark
 – Conformity mark
 Weight: 1.4 kg

Lamp

Luminaire connected wattage 24 W
 Rated temperature $t_a = 25$ °C
 Service life criteria 50 000 h / L₇₀

50 126.2 K3

Module designation 2x LED-0607/830
 Colour temperature 3000 K
 Colour rendering index $R_g > 80$
 Module luminous flux 2160 lm
 Luminaire luminous flux 1314 lm
 Luminaire luminous efficiency 54,8 lm/W

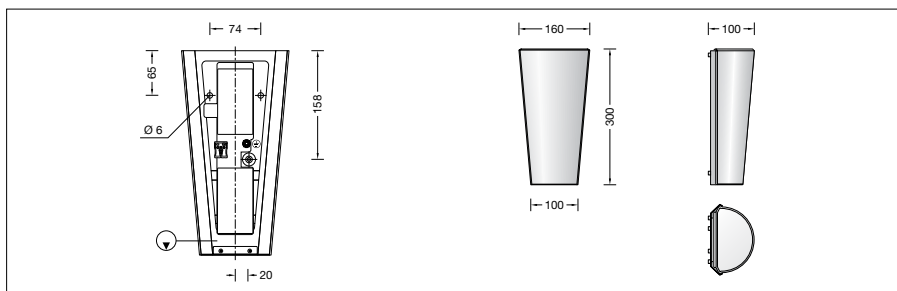

Article No. 50 126.2

Optional finishes

- White enamel code number **.1**
- Stainless steel code number **.2**
- Chrome code number **.3**
- Brass code number **.4**