

BEGA**50 126.3**

Wall luminaire for indoor use



Project · Reference number

Date

Product data sheet

Application

Free-radiating wall LED wall luminaire · indoor luminaire made of hand-blown opal glass, satin matt and metal housing.

The character of the three-ply opal glass creates a smooth and uniform light distribution in the room.

Product description

Metal housing, finish chrome

Hand-blown opal glass, satin matt

Mounting plate with 2 fixing

holes \varnothing 6 mm · 74 mm spacing

1 cable entry for mains supply cable

up to \varnothing 10.5 mm max. 3 x 1.5[□]


Connection terminal 2.5[□]

Earth conductor connection

LED-Module for mains voltage

220-230 V \sim 50/60 Hz

Safety class I

 – Safety mark

CE – Conformity mark

Weight: 1.4 kg

Lamp

Luminaire connected wattage

24 W

Rated temperature

$t_a = 25$ °C

Ambient temperature

$t_{a,max} = 30$ °C

Service life criteria

50 000 h/L₇₀

50 126.3 K3

Module designation

2x LED-0607/830

Colour temperature

3000 K

Colour rendering index

$R_a > 80$

Module luminous flux


2160 lm

Luminaire luminous flux

1314 lm

Luminaire luminous efficiency

54,8 lm/W

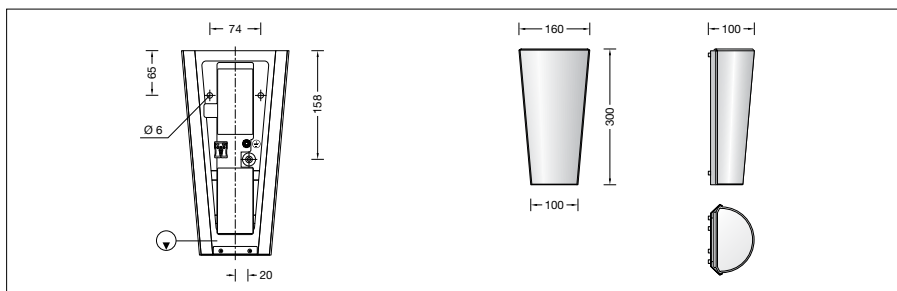

Article No. 50 126.3

Optional finishes

- White enamel
- Stainless steel
- Chrome
- Brass

code number **.1**

code number **.2**

code number **.3**

code number **.4**