

BEGA**50 158.2**

Recessed wall luminaire for indoor use

Project · Reference number

Date

Product data sheet**Application**

Recessed LED wall luminaire · indoor luminaire with crystal glass, inside white and metal housing. Luminaire with unshielded light for directing and conducting lighting.

Product description

Recessed ceiling luminaire »ACCENTA«
Die-cast zinc luminaire housing
Metal frame ring with safety glass, white inside
Stainless steel finish
Recess box with 2 fixing claws and fixing screws
Ceiling aperture \varnothing 68 mm
Free space installation depth required 65 mm
Mains cable up to \varnothing 10,5 mm, max. $3 \times 1.5^{\square}$
Connecting terminal 1.5^{\square}
Earth conductor connection
LED power supply unit
220-240 V \sim 0/50-60 Hz
DC 176-264 V
Safety class I
CE – Conformity mark
Weight: 0.25 kg

Inrush current

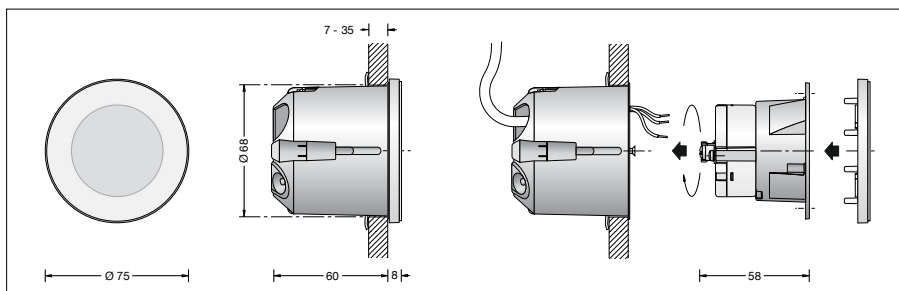
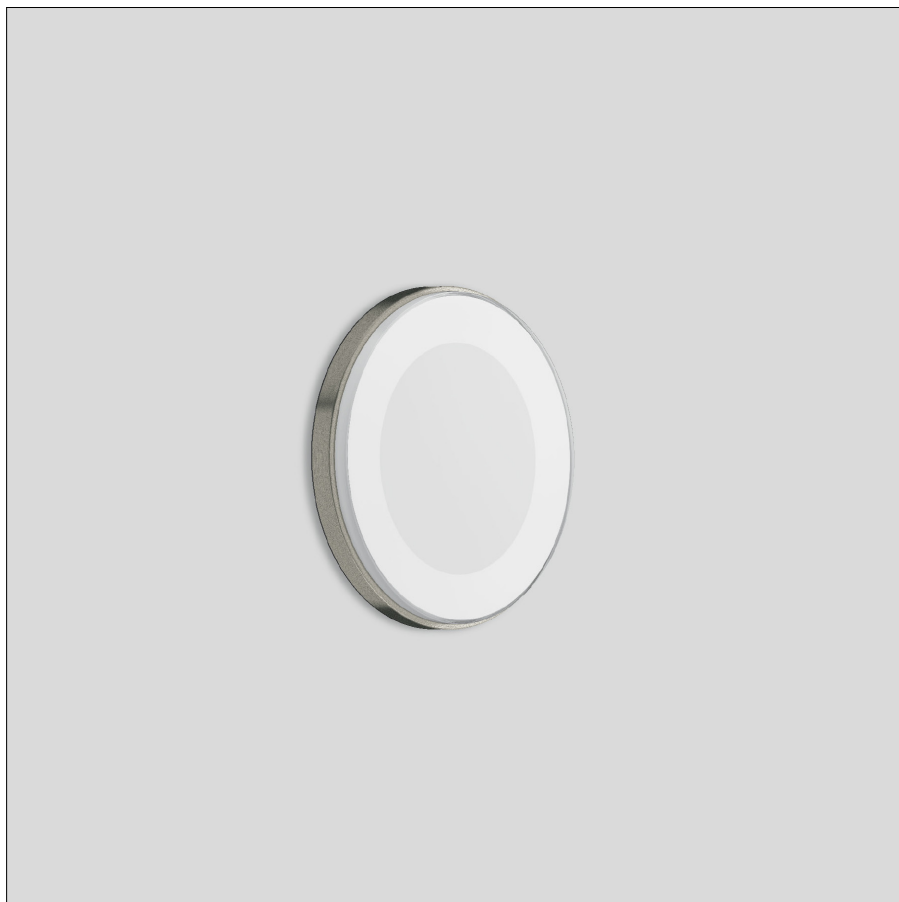
Inrush current: 20 A / 170 μ s
Maximum number of luminaires of this type per miniature circuit breaker:
B10A: 31 luminaires
B16A: 50 luminaires
C10A: 52 luminaires
C16A: 85 luminaires

Lamp

Module connected wattage 1 W
Luminaire connected wattage 2.1 W
Rated temperature $t_a = 25^{\circ}\text{C}$
Ambient temperature $t_{a \max} = 45^{\circ}\text{C}$
When installed in heat-insulating material $t_{a \max} = 35^{\circ}\text{C}$

50 158.2 K3

Module designation LED-0815/930
Colour temperature 3000 K
Colour rendering index CRI > 90
Module luminous flux 155 lm
Luminaire luminous flux 50 lm
Luminaire luminous efficiency 23,8 lm/W

**Service life of the LED**

Ambient temperature $t_a = 25^{\circ}\text{C}$
– at > 500,000h: L70B50

max. ambient temperature $t_a = 45^{\circ}\text{C}$
– at 360,000h: L70B50

Article No. 50 158.2

Finish options
• Enamel, white
• Stainless steel

Code number .1
Code number .2