

Wall luminaire for indoor use

Project · Reference number

Date


## Product data sheet

### Application

Free-radiating LED wall luminaire · indoor luminaire with crystal glass and metal bracket. For all lighting tasks in interior applications. They are ideal for places where a soft and uniform lighting distribution is required. The used LED technique offers durability and optimal light output with low power consumption at the same time.

### Product description

Metal housing, finish white enamel  
 Crystal glass, inside white  
 2 fixing holes  $\varnothing$  4.5 mm  
 219 mm spacing  
 2 cable entries for through-wiring for mains cable up to  $\varnothing$  10.5 mm max.  $3 \times 1.5^{\square}$   
 Connecting terminal  $2.5^{\square}$   
 Earth conductor connection  
 LED-Module for mains voltage  
 220-230 V  $\sim$  50/60 Hz  
 Safety class I  
**CE** – Conformity mark  
 Weight: 2.4 kg

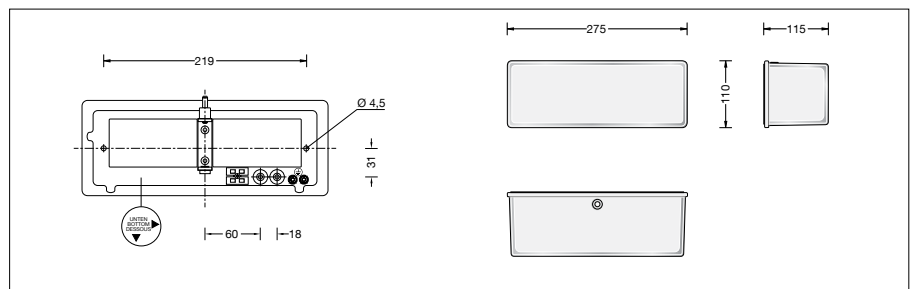

### Lamp

Luminaire connected wattage	16 W
Rated temperature	$t_a = 25 \text{ }^{\circ}\text{C}$
Ambient temperature	$t_{a \text{ max}} = 45 \text{ }^{\circ}\text{C}$
Service life criteria	50 000 h / $L_{70}$

Module designation	2x LED-0662/830
Colour temperature	3000 K
Colour rendering index	$R_a > 80$
Module luminous flux	1520 lm
Luminaire luminous flux	1149 lm
Luminaire luminous efficiency	71,8 lm/W