

**BEGA****50 214.4**

Wall luminaire for indoor use



Project · Reference number



Date

## Product data sheet

### Application

LED wall luminaire · indoor luminaire with velvet black luminaire housing and inside hue.  
The light emits upwards and downwards.

### Product description

LED wall luminaire »STUDIO LINE«  
Aluminium luminaire housing,  
velvet black enamel finish,  
Inside hue matt brass  
Reflector made of pure anodised aluminium  
2 elongated fixing holes  
Width 4.5 mm · 90 x 38 mm spacing  
1 cable entry for through-wiring  
for mains cable  
Connecting terminal 2.5<sup>□</sup>  
with plug connection  
Earth conductor connection  
LED-Module for mains voltage  
220-230 V ~ 50/60 Hz  
Safety class I  
 – Safety mark  
 – Conformity mark  
Weight: 0.8 kg

### Light technique

Luminaire data for the light planning program  
DIALux for outdoor lighting, street lighting and  
indoor lighting as well as luminaire data in  
EULUMDAT- and IES-format you will find on the  
BEGA web page [www.bega.com](http://www.bega.com).



### Lamp

Luminaire connected wattage 16 W  
Rated temperature  $t_a = 25\text{ °C}$   
Ambient temperature  $t_{a\text{ max}} = 45\text{ °C}$

### 50 214.4 K3

Module designation LED-0608/830  
Colour temperature 3000 K  
Colour rendering index  $R_a > 80$   
Module luminous flux 1520 lm  
Luminaire luminous flux\* 479 lm  
Luminaire luminous efficiency\* 29,9 lm/W

\* preliminary data

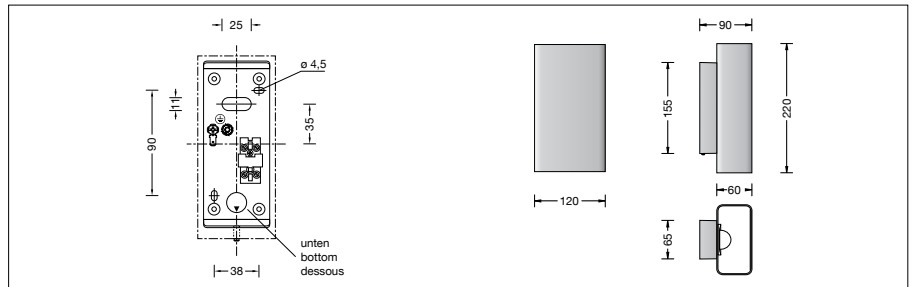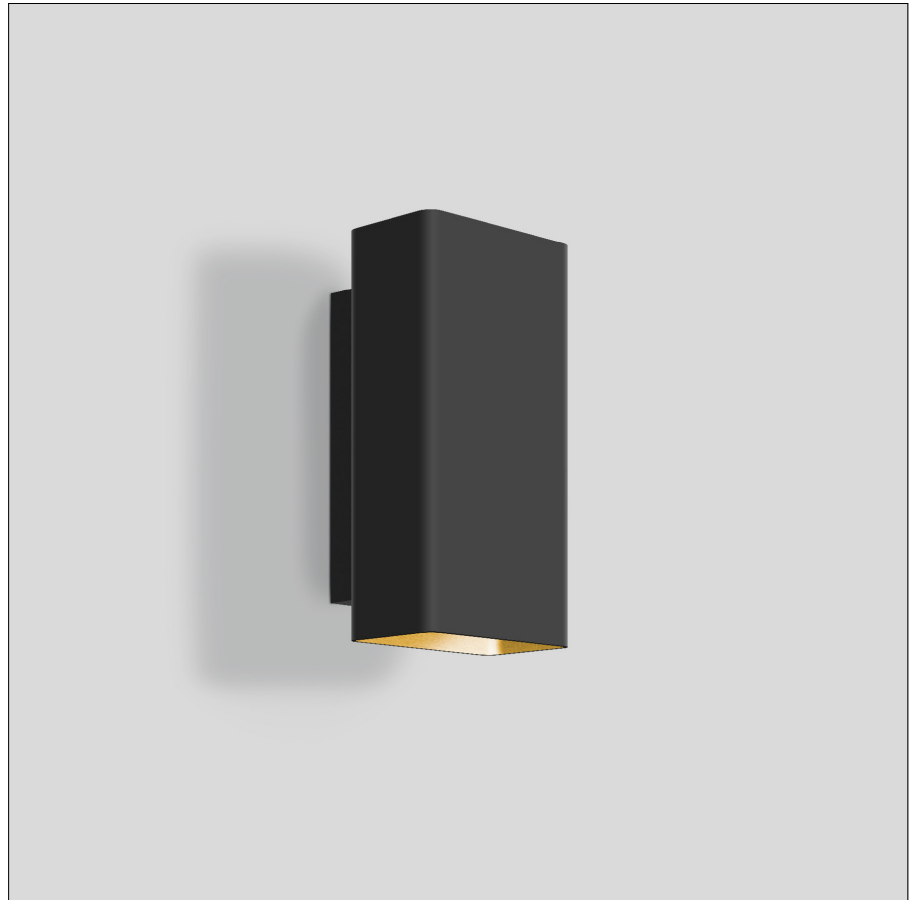

### Service life of the LED

Ambient temperature  $t_a = 25\text{ °C}$   
– at 78,000h: L70B50

max. ambient temperature  $t_a = 45\text{ °C}$   
– at 58,000h: L70B50

### Article No. 50 214.4

Interior colour options

- matt aluminium
- matt brass
- matt copper

Code number **.2**Code number **.4**Code number **.6**