BEGA 50 252.2

Recessed ceiling luminaire for indoor use



Project · Reference number

Date

Product data sheet

Application

Recessed LED-ceiling luminaire · indoor luminaire with aluminium housing for shielded light deflected downwards.

Luminaire for connection to external LED power supply unit.

The used LED technique offers durability and optimal light output with low power consumption at the same time.

Product description

Recessed LED ceiling luminaire »STUDIO LINE« made of die-cast aluminium –

without power supply unit

Aluminium housing shield, velvet black enamel finish, Inside hue matt aluminium Light-diffusing silicone lens Reflector of anodised pure aluminium Fixing is achieved by using 2 adjustable wedge-shaped claws

1 connecting cable with strain relief and plug connector system for BEGA power supply unit, on/off or DALI

Safety class III 🕸

C € – Conformity mark Weight: 0.4 kg

.....

Accessories

Power supply units for LED luminaires 220-240 V \cdot 0/50-60 Hz with strain relief and plug connector system.

13144 Power supply unit on/off **13169** Power supply unit DALI

The power supply units are only suitable for the operation of one LED luminaire.

For the accessories a separate instructions for use can be provided upon request.

Lighting technology

Half beam angle 48° Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and

interior lighting as well as luminaire data in EULUMDAT and IES format are available on our website www.bega.com.

Lamp


| Module connected wattage | 12.3 W |
|-----------------------------|-----------------------------|
| Luminaire connected wattage | 14.3 W |
| Rated temperature | t _a =25 °C |
| Ambient temperature | $t_{a max} = 25 ^{\circ}C$ |
| | |

50 252.2 K3

| 00 E0E.E 110 | |
|--------------------------------|--------------|
| Module designation | LED-0423/930 |
| Colour temperature | 3000 K |
| Colour rendering index | CRI > 90 |
| Module luminous flux | 1640 lm |
| Luminaire luminous flux* | 818 lm |
| Luminaire luminous efficiency* | 57,2 lm/W |

^{*} preliminary data



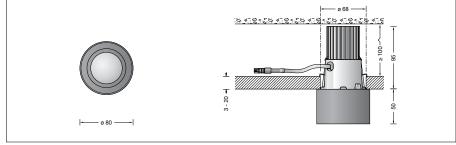

Service life of the LED

max. ambient temperature t_a = 25 °C – at 160,000 h: L70 B50

Article No. 50 252.2

Interior colour options

- matt aluminium
- matt brass
- matt copper

Code number .4
Code number .6