

BEGA**50 253.2**

Recessed ceiling luminaire for indoor use



Project · Reference number

Date

Product data sheet


Application

Recessed LED-ceiling luminaire · indoor
luminaire with aluminium housing for shielded
light deflected downwards.
Luminaire for connection to external LED power
supply unit.

Product description

Recessed LED ceiling luminaire »STUDIO LINE«
made of die-cast aluminium –

without power supply unit

Aluminium housing shield,
velvet black enamel finish,
Inside hue matt aluminium
Light-diffusing silicone lens
Reflector of anodised pure aluminium
Fixing is achieved by using 2 adjustable
wedge-shaped claws
1 connecting cable with strain relief and plug
connector system for BEGA power supply unit,
on/off or DALI
Safety class III 
CE – Conformity mark
Weight: 0.4 kg

Accessories

Power supply units for LED luminaires
220-240 V · 0/50-60 Hz with strain relief and
plug connector system.

13 144 Power supply unit on/off

13 169 Power supply unit DALI

The power supply units are only suitable
for the operation of one LED luminaire.

For the accessories a separate instructions
for use can be provided upon request.

Lighting technology

Half beam angle 48°
Luminaire data for the light planning program
DIALux for outdoor lighting, street lighting and
interior lighting as well as luminaire data in
EULUMDAT and IES format are available on our
website www.bega.com.


Lamp

Module connected wattage	12.3 W
Luminaire connected wattage	14.3 W
Rated temperature	$t_a = 25 \text{ }^\circ\text{C}$
Ambient temperature	$t_{a \text{ max}} = 25 \text{ }^\circ\text{C}$

50 253.2 K3

Module designation	LED-0423/930
Colour temperature	3000 K
Colour rendering index	CRI > 90
Module luminous flux	1640 lm
Luminaire luminous flux*	818 lm
Luminaire luminous efficiency*	57,2 lm/W

* preliminary data

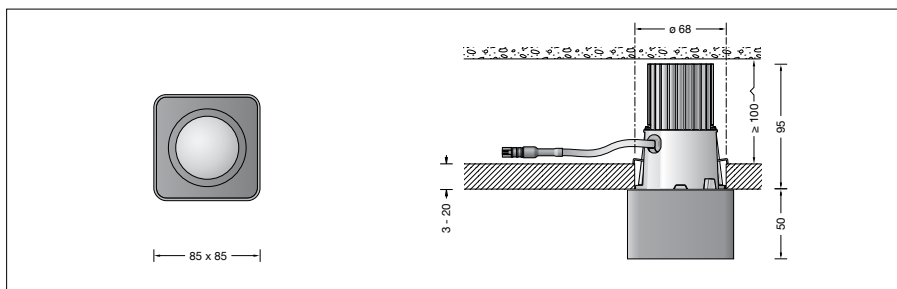

Service life of the LED

max. ambient temperature $t_a = 25 \text{ }^\circ\text{C}$
– at 160,000h: L70B50

Article No. 50 253.2

Interior colour options

- matt aluminium
- matt brass
- matt copper

Code number **.2**

Code number **.4**

Code number **.6**