

Wall luminaire for indoor use

Project · Reference number

Date

Product data sheet**Application**

LED wall luminaire · indoor luminaire made of hand-blown opal glass, satin matt and metal fitting, for all lighting tasks.

They are ideal for places where a soft and uniform lighting distribution is required.

Product description

Metal housing, finish
white enamel

Hand-blown opal glass, satin matt

2 mounting holes \varnothing 6 mm

Distance apart 300 mm

2 cable entries for through-wiring for mains

cable up to \varnothing 10,5 mm max. 3×1.5

Connection terminal 2.5

Earth conductor connection

LED-Module for mains voltage

220-230 V \sim 50/60 Hz

BEGA Thermal Switch®

Temporary thermal shutdown to protect temperature-sensitive components

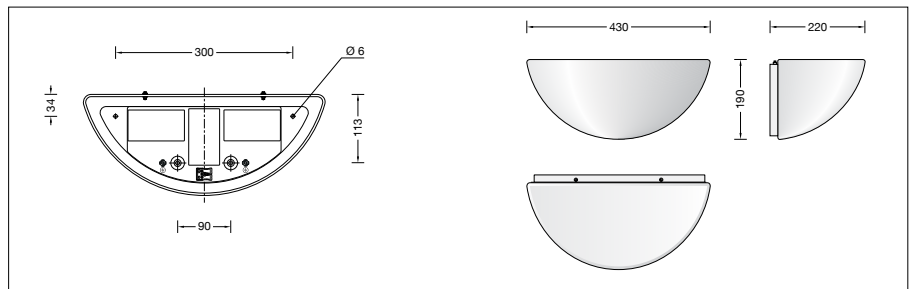
Safety class I

CE – Conformity mark

Weight: 4.0 kg

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

**Lamp**

Luminaire connected wattage	36 W
Rated temperature	$t_a = 25$ °C
Ambient temperature	$t_{a \max} = 40$ °C

50 257 K3

Module designation	3x LED-0607/830
Colour temperature	3000 K
Colour rendering index	$R_a > 80$
Module luminous flux	3540 lm
Luminaire luminous flux	2517 lm
Luminaire luminous efficiency	69,9 lm/W

Service life of the LED

Ambient temperature $t_a = 25$ °C	– at 38,000h: L70B50
max. ambient temperature $t_a = 40$ °C	– at 31,000h: L70B50