

BEGA**50 297**

Recessed ceiling and wall luminaire for indoor use



Project · Reference number

Date

Product data sheet

Application

Recessed LED-ceiling and wall luminaire · indoor luminaire with hand-blown opaque crystal glass and aluminium housing and with external LED power supply unit.

Luminaire with adjustable colour temperature (Tunable White).

They are ideal for places where a soft and uniform lighting distribution is required.

For installation into ceilings with a shallow depth in interior areas.

Product description

Recessed LED-ceiling and wall luminaire with a remote DALI controllable power supply unit

Luminaire housing made of aluminium

Hand-blown opaque crystal glass,

with screw-neck

Silicone gasket

Recessed opening \varnothing 240 mm

Recessed depth required 65 mm

Fixing is achieved by using two adjustable

wedge-shaped claws

Connecting terminal DA DA for

digital control

LED power supply unit

220-240 V \sim 0/50-60 Hz

DALI controllable (Device Type 8 for Tunable

White according to IEC 62386-209)

A basic isolation exists between power cable

and control line

Safety class II

CE – Conformity mark

Weight: 4.5 kg

Lamp

Module connected wattage 18.1 W

Luminaire connected wattage 21 W

Rated temperature $t_a = 25$ °C

Ambient temperature $t_{a \max} = 40$ °C

When installed in heat-insulating

material $t_{a \max} = 30$ °C

Module designation LED-0816/9TW

Colour temperature adjust. 2700 - 6500 K

Colour rendering index $R_a > 90$

Module luminous flux 2325 lm

Luminaire luminous flux* 1235 lm


Luminaire luminous efficiency* 58,8 lm/W

* preliminary data

Setting the colour temperature

The LED colour temperature of the luminaire can be set from 2700 to 6500 K ("Tunable White").

Please note: To be able to set the LED colour temperature, the controller used must support DALI Device Type 8. If no LED colour temperature setting is made, 3000 K will be used by default.

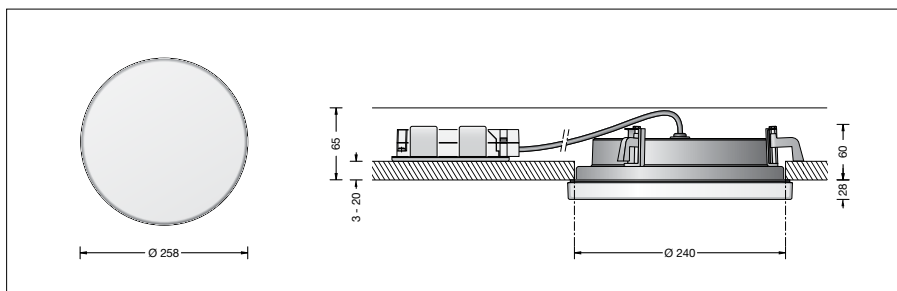

Lifetime of the LED

Ambient temperature $t_a = 15$ °C

– at 50,000 h: L90 B10

– at 289,000 h: L70 B50

Ambient temperature $t_a = 25$ °C

– at 50,000 h: L90 B50

– at 158,000 h: L70 B50

max. ambient temperature $t_a = 40$ °C

– at 50,000 h: L70 B10

– at 118,000 h: L70 B50

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Accessories

13028 Installation housing

For the accessories a separate instructions for use can be provided upon request.