

BEGA**50 338.1**

Recessed ceiling luminaire for indoor use



Project · Reference number


Date


Product data sheet

Application

Recessed LED-ceiling luminaire · indoor luminaire with asymmetrical wide beam light distribution. For installation in suspended ceilings of 5-25 mm in interior applications.

Product description

Recessed LED ceiling luminaire with a remote power supply unit
 Luminaire housing made of cast aluminium
 Finish white enamel
 Reflector surface made of pure aluminium
 Light-diffusing disc
 Fixing is achieved by using 2 fastening springs
 Recessed opening \varnothing 170 mm
 Recessed depth required 90 mm
 Power connecting cable max. 2×1.5 [□]
 External LED power supply unit
 220-240 V \sim 50-60 Hz
 Safety class II 
CE – Conformity mark

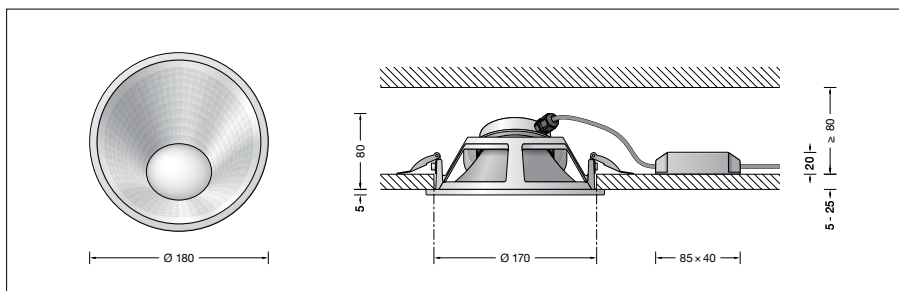

Lamp

Module connected wattage	8.9 W
Luminaire connected wattage	10.8 W
Rated temperature	$t_a = 25$ °C
Service life criteria	50 000 h / L_{70}

Article No. 50 338.1

LED colour temperature optionally 3000 K or 4000 K
3000 K – Article number + K3
4000 K – Article number + K4

50 338.1 K3

Module designation	LED-0859/930
Colour temperature	3000 K
Colour rendering index	CRI > 90
Module luminous flux	1370 lm
Luminaire luminous flux	964 lm
Luminaire luminous efficiency	89,3 lm/W

50 338.1 K4

Module designation	LED-0859/940
Colour temperature	4000 K
Colour rendering index	CRI > 90
Module luminous flux	1415 lm
Luminaire luminous flux	996 lm
Luminaire luminous efficiency	92,2 lm/W