

BEGA**50 345.3**

Ceiling and wall luminaire for indoor use

IP 44

Project · Reference number

Date

Product data sheet**Application**

Ceiling and wall luminaire · indoor luminaire made of hand-blown opal glass and metal housing, for all lighting tasks. They are ideal for places where a soft and uniform lighting distribution is required.

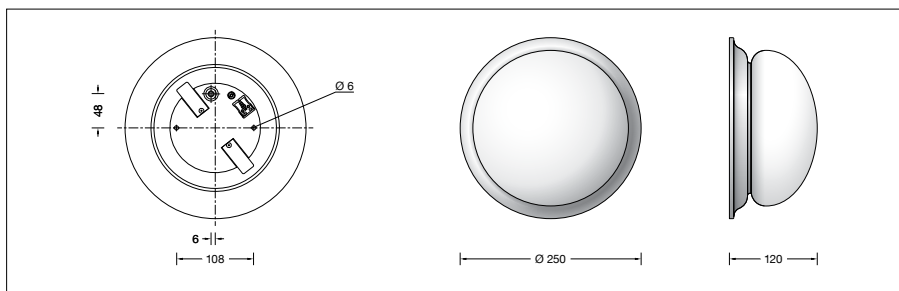
Product description

Metal housing,
finish white enamel
Chrome-plated ornamental ring
Hand-blown opal glass, with sliding-bolt closure
2 fixing holes \varnothing 6 mm
108 mm spacing
Connecting terminal 2.5[□]
Earth conductor connection
LED-Module for mains voltage
220-230 V \sim 50/60 Hz
Safety class I
Protection class IP 44
Protected against granular foreign bodies > 1 mm and splash water
CE – Conformity mark
Weight: 0.85 kg

Lamp

Luminaire connected wattage 12 W
Rated temperature $t_a = 25$ °C
Ambient temperature $t_{a \max} = 30$ °C

Module designation LED-0607/830
Colour temperature 3000 K
Colour rendering index $R_a > 80$
Module luminous flux 1080 lm
Luminaire luminous flux 865 lm
Luminaire luminous efficiency 72,1 lm/W

**Lifetime of the LED**

Ambient temperature $t_a = 15$ °C
– at 50,000 h: L70 B50
– at 64,000 h: L70 B50

Ambient temperature $t_a = 25$ °C
– at 50,000 h: L70 B50
– at 56,000 h: L70 B50

max. ambient temperature $t_a = 30$ °C
– at 50,000 h: L70 B50
– at 52,000 h: L70 B50

Article No. 50 345.3

Finish options
• Enamel, white
• Stainless steel
• Chrome
• Brass

Code number **.1**
Code number **.2**
Code number **.3**
Code number **.4**