

**BEGA****50 347.4**

Wall luminaire for indoor use

Project · Reference number

Date

**Product data sheet****Application**

LED wall luminaire · indoor luminaire with white luminaire housing and inside hue.  
The light emits upwards and downwards.  
The used LED technique offers durability and optimal light output with low power consumption at the same time.

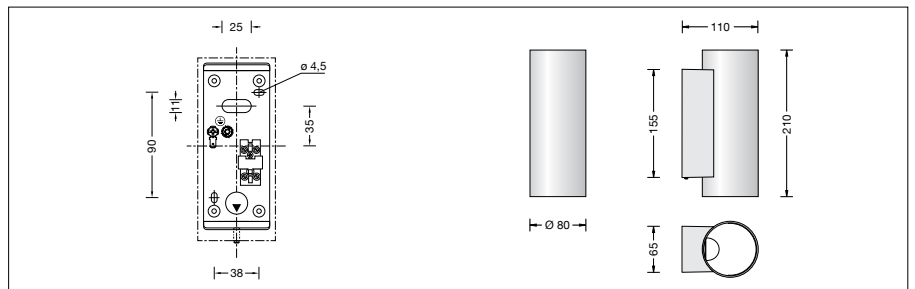
**Product description**

LED wall luminaire »STUDIO LINE«  
Aluminium luminaire housing,  
velvet white enamel finish,  
Inside hue matt brass  
Reflector made of pure anodised aluminium  
2 mounting holes  $\varnothing$  4.5 mm  
Elongated holes · 90 x 38 mm spacing  
1 cable entry for through-wiring  
for mains cable  
Connecting terminal 2.5<sup>□</sup>  
with plug connection  
Earth conductor connection  
LED-Module for mains voltage  
220-230 V  $\sim$  50/60 Hz  
Safety class I  
**CE** – Conformity mark  
Weight: 0.7 kg

**Lamp**

Luminaire connected wattage 12 W  
Rated temperature  $t_a = 25$  °C  
Ambient temperature  $t_{a \max} = 55$  °C

Module designation LED-0607/830  
Colour temperature 3000 K  
Colour rendering index  $R_a > 80$   
Module luminous flux 1080 lm  
Luminaire luminous flux 301 lm  
Luminaire luminous efficiency 25,1 lm/W

**Lifetime of the LED**

Ambient temperature  $t_a = 15$  °C  
– at 50,000 h: L80 B50  
– at 80,000 h: L70 B50

Ambient temperature  $t_a = 25$  °C  
– at 50,000 h: L80 B50  
– at 80,000 h: L70 B50

max. ambient temperature  $t_a = 55$  °C  
– at 50,000 h: L70 B50  
– at 52,000 h: L70 B50

**Article No. 50 347.4**

Interior colour options

- matt aluminium
- matt brass
- matt copper

Code number **.2**Code number **.4**Code number **.6**