

**BEGA****50 349.2**

Wall luminaire for indoor use



Project · Reference number

Date

## Product data sheet

### Application

LED wall luminaire · indoor luminaire with white luminaire housing and inside hue.  
The light emits upwards and downwards.

### Product description

LED wall luminaire »STUDIO LINE«  
Aluminium luminaire housing,  
velvet white enamel finish,  
Inside hue matt aluminium  
Reflector made of pure anodised aluminium  
2 elongated fixing holes  
Width 4.5 mm · 90 x 38 mm spacing  
1 cable entry for through-wiring  
for mains cable  
Connecting terminal 2.5<sup>□</sup>  
with plug connection  
Earth conductor connection  
LED-Module for mains voltage  
220-230 V ~ 50/60 Hz  
Safety class I  
 – Safety mark  
 – Conformity mark  
Weight: 0.65 kg

### Light technique


Luminaire data for the light planning program  
DIALux for outdoor lighting, street lighting and  
indoor lighting as well as luminaire data in  
EULUMDAT- and IES-format you will find on the  
BEGA web page [www.bega.com](http://www.bega.com).

### Lamp

Luminaire connected wattage 12 W  
Rated temperature  $t_a = 25\text{ °C}$   
Ambient temperature  $t_{a\text{ max}} = 50\text{ °C}$

### 50 349.2 K3

Module designation LED-0607/830  
Colour temperature 3000 K  
Colour rendering index  $R_a > 80$   
Module luminous flux 1080 lm  
Luminaire luminous flux 372 lm  
Luminaire luminous efficiency 31 lm/W

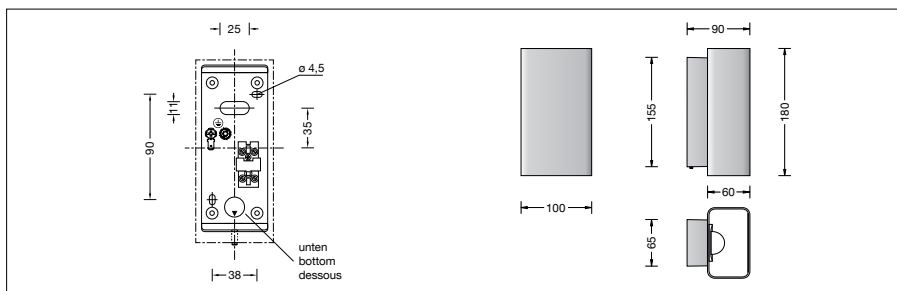

### Service life of the LED

Ambient temperature  $t_a = 25\text{ °C}$   
– at 80,000h: L70B50

max. ambient temperature  $t_a = 50\text{ °C}$   
– at 58,000h: L70B50

### Article No. 50 349.2

Interior colour options

- matt aluminium
- matt brass
- matt copper

Code number **.2**Code number **.4**Code number **.6**