

**BEGA****50 349.4**

Wall luminaire for indoor use



Project · Reference number


Date

## Product data sheet

### Application

LED wall luminaire · indoor luminaire with white luminaire housing and inside hue.  
The light emits upwards and downwards.  
The used LED technique offers durability and optimal light output with low power consumption at the same time.

### Product description

LED wall luminaire »STUDIO LINE«  
Aluminium luminaire housing,  
velvet white enamel finish,  
Inside hue matt brass  
Reflector made of pure anodised aluminium  
2 elongated fixing holes  
Width 4,5 mm · 90 x 38 mm spacing  
1 cable entry for through-wiring  
for mains cable  
Connecting terminal 2.5<sup>□</sup>  
with plug connection  
Earth conductor connection  
LED-Module for mains voltage  
220-230 V ~ 50/60 Hz  
Safety class I  
 – Safety mark  
**CE** – Conformity mark  
Weight: 0.65 kg

### Light technique


Luminaire data for the light planning program  
DIALux for outdoor lighting, street lighting and  
indoor lighting as well as luminaire data in  
EULUMDAT- and IES-format you will find on the  
BEGA web page [www.bega.com](http://www.bega.com).

### Lamp

Luminaire connected wattage 12 W  
Rated temperature  $t_a = 25\text{ °C}$   
Ambient temperature  $t_{a\text{ max}} = 50\text{ °C}$

### 50 349.4 K3

Module designation LED-0607/830  
Colour temperature 3000 K  
Colour rendering index  $R_a > 80$   
Module luminous flux 1080 lm  
Luminaire luminous flux 297 lm  
Luminaire luminous efficiency 24,8 lm/W

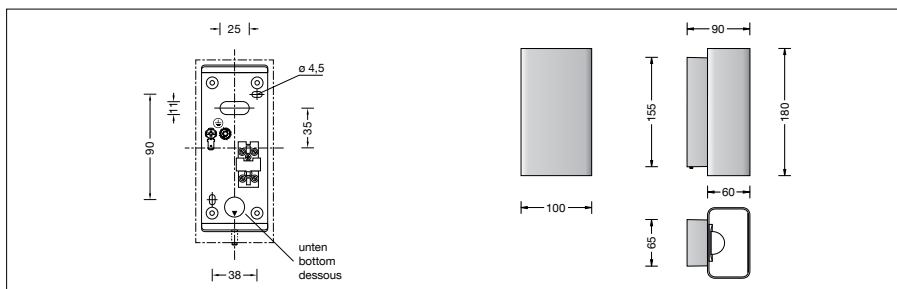

### Service life of the LED

Ambient temperature  $t_a = 25\text{ °C}$   
– at 80,000h: L70B50

max. ambient temperature  $t_a = 50\text{ °C}$   
– at 58,000h: L70B50

### Article No. 50 349.4

Interior colour options

- matt aluminium
- matt brass
- matt copper

Code number **.2**Code number **.4**Code number **.6**