

BEGA**50 350.2**

Wall luminaire for indoor use



Project · Reference number



Date

Product data sheet

Application

LED wall luminaire · indoor luminaire with white luminaire housing and inside hue.
The light emits upwards and downwards.

Product description

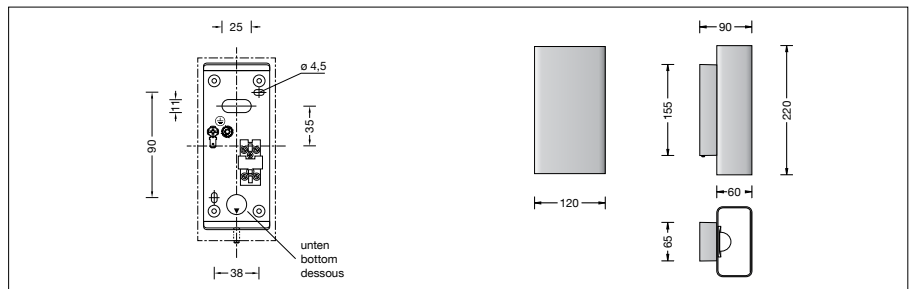
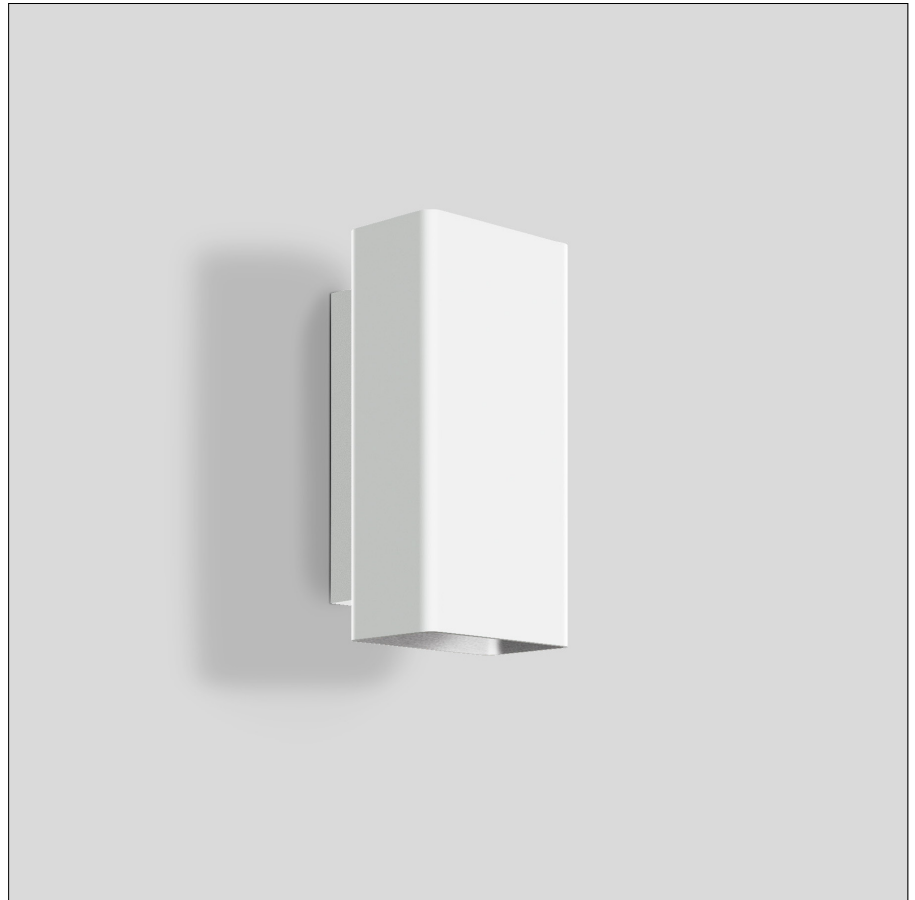
LED wall luminaire »STUDIO LINE«
Aluminium luminaire housing,
velvet white enamel finish,
Inside hue matt aluminium
Reflector made of pure anodised aluminium
2 elongated fixing holes
Width 4.5 mm · 90 x 38 mm spacing
1 cable entry for through-wiring
for mains cable
Connecting terminal 2.5[□]
with plug connection
Earth conductor connection
LED-Module for mains voltage
220-230 V ~ 50/60 Hz
Safety class I
 – Safety mark
 – Conformity mark
Weight: 0.8 kg

Lamp

Luminaire connected wattage 16 W
Rated temperature $t_a = 25\text{ °C}$
Ambient temperature $t_{a\text{ max}} = 45\text{ °C}$

50 350.2 K3

Module designation LED-0608/830
Colour temperature 3000 K
Colour rendering index $R_a > 80$
Module luminous flux 1520 lm
Luminaire luminous flux 483 lm
Luminaire luminous efficiency 30,2 lm/W



Service life of the LED

Ambient temperature $t_a = 25\text{ °C}$
– at 78,000h: L70B50

max. ambient temperature $t_a = 45\text{ °C}$
– at 58,000h: L70B50

Light technique

Luminaire data for the light planning program
DIALux for outdoor lighting, street lighting and
indoor lighting as well as luminaire data in
EULUMDAT- and IES-format you will find on the
BEGA web page www.bega.com.

Article No. 50 350.2

Interior colour options

- matt aluminium
- matt brass
- matt copper

Code number **.2**Code number **.4**Code number **.6**