

BEGA**50 358.6**

Pendant luminaire for indoor use

Project · Reference number

Date

Product data sheet**Application**

LED pendant luminaire · indoor luminaire with aluminium housing for non-glare light deflected downwards.

The used LED technique offers durability and optimal light output with low power consumption at the same time.

Product description

LED pendant luminaire »STUDIO LINE«

Aluminium luminaire housing,

velvet white enamel finish

Inside hue matt copper

Light diffusing silicone lens

Mounting plate with 2 fixing holes \varnothing 4.5 mm · 42 mm spacing

White flex suspension $2 \times 0.5^{\square}$

Overall length of luminaire ~1700 mm

Connecting terminals 2.5^{\square}

Earth conductor connection

LED power supply unit inside canopy

220-240 V \sim 0/50-60 Hz

Safety class I

CE – Conformity mark

Weight: 2.0 kg

Inrush current

Inrush current: 20 A / 80 μ s

Maximum number of luminaires of this type per miniature circuit breaker:

B10A: 35 luminaires

B16A: 56 luminaires

C10A: 58 luminaires

C16A: 94 luminaires

Lamp

Module connected wattage 12.9 W

Luminaire connected wattage 15 W

Rated temperature $t_a = 25^{\circ}\text{C}$

Ambient temperature $t_{a\text{max}} = 50^{\circ}\text{C}$

Module designation LED-0623/930

Colour temperature 3000 K

Colour rendering index $R_a > 90$

Module luminous flux 1475 lm

Luminaire luminous flux 388 lm

Luminaire luminous efficiency 25,9 lm/W

Lifetime of the LED

Ambient temperature $t_a = 15^{\circ}\text{C}$

– at 50,000h: L90B10

– at > 500,000h: L70B50

Ambient temperature $t_a = 25^{\circ}\text{C}$

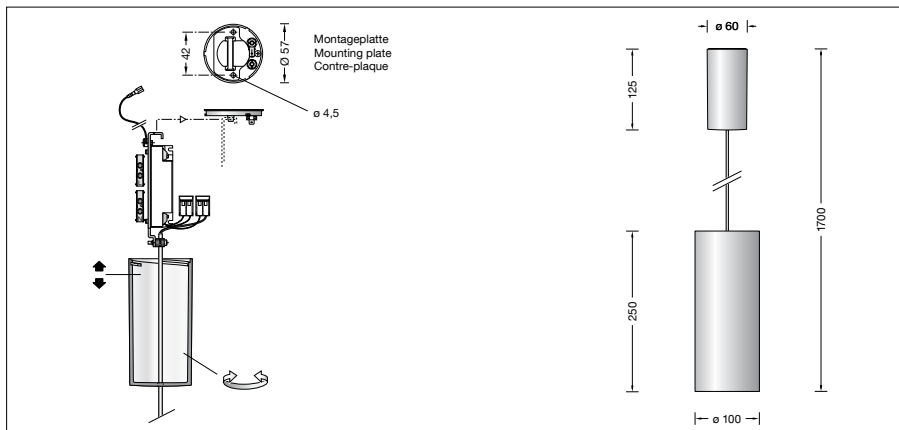
– at 50,000h: L90B10

– at 302,000h: L70B50

max. ambient temperature $t_a = 50^{\circ}\text{C}$

– at 50,000h: L70B50

– at 70,000h: L70B50

**Article No. 50 358.6**

Interior colour options

- matt aluminium
- matt brass
- matt copper

Code number **.2**

Code number **.4**

Code number **.6**