

BEGA**50 388.1**

Recessed ceiling luminaire for indoor use



Project · Reference number

Date

Product data sheet

Application

LED recessed ceiling downlight · Interior luminaire with asymmetrical light distribution for connection to an external LED power supply unit.
For surface mounted installation in suspended ceilings in interior of 5-25 mm.

Product description

LED recessed luminaire without power supply unit
Luminaire housing made of cast aluminium
Installation housing is made of glass fibre reinforced synthetic material (polyamide) with 2 fastening springs
Reflector surface made of pure aluminium
Light-diffusing silicone lens
Metal ceiling frame ring, finish white enamel
Safety glass
Recessed opening \varnothing 184 mm
Recessed depth required 130 mm
1 connecting cable with strain relief and plug connector system for BEGA power supply unit, on/off or DALI
Safety class III
CE – Conformity mark

Lighting technology

Half beam angle 46/70°
Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and interior lighting as well as luminaire data in EULUMDAT and IES format are available on our website www.bega.com.

Lamp


Module connected wattage 17.2 W
Luminaire connected wattage 20 W
Rated temperature $t_a = 25$ °C
Ambient temperature $t_{a \max} = 35$ °C

50 388.1 K3

Module designation LED-0785/930
Colour temperature 3000 K
Colour rendering index CRI > 90
Module luminous flux 2655 lm
Luminaire luminous flux 2130 lm
Luminaire luminous efficiency 106,5 lm/W

50 388.1 K4

Module designation LED-0785/940
Colour temperature 4000 K
Colour rendering index CRI > 90
Module luminous flux 2695 lm
Luminaire luminous flux 2162 lm
Luminaire luminous efficiency 108,1 lm/W

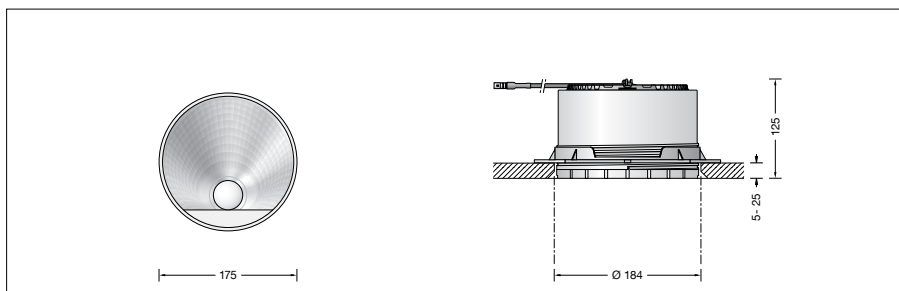

Lifetime of the LED

Ambient temperature $t_a = 15$ °C
– at 50,000 h: L90 B10
– at 370,000 h: L70 B50

Ambient temperature $t_a = 25$ °C
– at 50,000 h: L90 B10
– at 320,000 h: L70 B50

max. ambient temperature $t_a = 35$ °C
– at 50,000 h: L80 B10
– at 275,000 h: L70 B50

Article No. 50 388.1

LED colour temperature optionally 3000 K or 4000 K
3000 K – Article number + **K3**
4000 K – Article number + **K4**

Accessories

Power supply units for LED luminaires 220-240 V · 0/50-60 Hz with strain relief and plug connector system.

13 144 Power supply unit on/off
13 170 Power supply unit DALI

The power supply units are only suitable for the operation of one LED luminaire.

For the accessories a separate instructions for use can be provided upon request.