

**BEGA****50 396.2**

Recessed ceiling luminaire for indoor use



Project · Reference number


Date

## Product data sheet

### Application

LED recessed ceiling downlight · Interior luminaire with asymmetrical light distribution for connection to an external LED power supply unit.  
For surface mounted installation in suspended ceilings in interior of 5-25 mm.

### Product description

LED recessed luminaire without power supply unit  
Luminaire housing made of cast aluminium  
Installation housing is made of glass-fibre reinforced polyamide with 2 fastening springs  
Reflector surface made of pure aluminium  
Light-diffusing silicone lens  
Ceiling frame ring stainless steel finish  
Safety glass  
Recessed opening  $\varnothing$  146 mm  
Recessed depth required 105 mm  
1 connecting cable with strain relief and plug connector system for BEGA power supply unit, on/off or DALI  
Safety class III   
**CE** – Conformity mark  
Weight: 0.8 kg

### Lamp

|                             |                      |
|-----------------------------|----------------------|
| Module connected wattage    | 11.5 W               |
| Luminaire connected wattage | 13.3 W               |
| Rated temperature           | $t_a = 25$ °C        |
| Ambient temperature         | $t_{a \max} = 35$ °C |

### 50 396.2 K3

|                               |              |
|-------------------------------|--------------|
| Module designation            | LED-0800/930 |
| Colour temperature            | 3000 K       |
| Colour rendering index        | CRI > 90     |
| Module luminous flux          | 1735 lm      |
| Luminaire luminous flux       | 1390 lm      |
| Luminaire luminous efficiency | 104,5 lm/W   |


### 50 396.2 K4

|                               |              |
|-------------------------------|--------------|
| Module designation            | LED-0800/940 |
| Colour temperature            | 4000 K       |
| Colour rendering index        | CRI > 90     |
| Module luminous flux          | 1760 lm      |
| Luminaire luminous flux       | 1410 lm      |
| Luminaire luminous efficiency | 106 lm/W     |

### Service life of the LED

Ambient temperature  $t_a = 25$  °C  
– at 310,000h: L70B50

max. ambient temperature  $t_a = 35$  °C  
– at 220,000h: L70B50

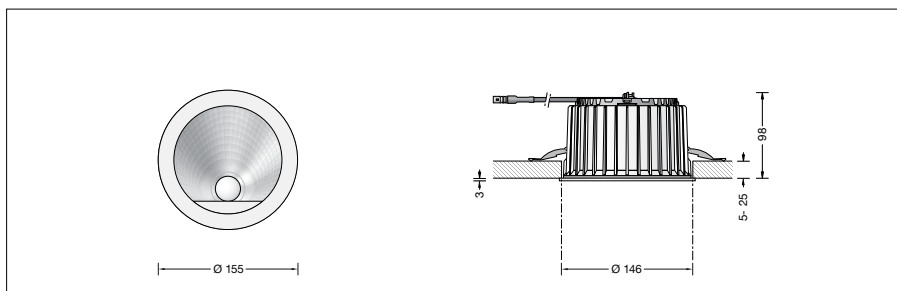

### Accessories

Power supply units for LED luminaires  
220-240 V · 0/50-60 Hz with strain relief and plug connector system.

**13 144** Power supply unit on/off  
**13 169** Power supply unit DALI

The power supply units are only suitable for the operation of one LED luminaire.

For the accessories a separate instructions for use can be provided upon request.

### Lighting technology

Half beam angle 45/60°  
Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting, as well as luminaire data in EULUMDAT and IES format are available on the BEGA website at [www.bega.com](http://www.bega.com).

### Article No. 50 396.2

LED colour temperature optionally 3000 K or 4000 K  
3000 K – Article number + **K3**  
4000 K – Article number + **K4**

### Optional finishes

- White enamel code number **.1**
- Stainless steel code number **.2**
- Chrome code number **.3**