

**BEGA****50 443.1**

Recessed ceiling luminaire for indoor use



Project · Reference number

Date

## Product data sheet

### Application

LED recessed ceiling downlight · Interior luminaire with symmetrical narrow beam light distribution for connection to an external LED power supply unit.

For flush installation in indoor suspended ceilings of 5-25 mm thickness.

### Product description

LED recessed luminaire without power supply unit

Luminaire housing made of cast aluminium

The recessed housing is made of glass fibre reinforced synthetic material (polyamide).

Centre-plate made of rigid polystyrene foam

Reflector surface made of pure aluminium

Optical silicone lens

Metal ceiling frame ring,  
finish white enamel

Safety glass

Recessed opening  $\varnothing$  142 mm

Recessed depth required 105 mm

1 connecting cable with strain relief and plug connector system for BEGA power supply unit, on/off or DALI

Safety class III

**CE** – Conformity mark

### Lighting technology

Half beam angle 15°

Luminaire data for the light planning program

DIALux for outdoor lighting, street lighting and interior lighting as well as luminaire data in

EULUMDAT and IES format are available on our website [www.bega.com](http://www.bega.com).

### Lamp

Module connected wattage 16.8 W

Luminaire connected wattage 19.5 W

Rated temperature  $t_a = 25 \text{ }^\circ\text{C}$

Service life criteria 50 000 h/L<sub>70</sub>

### 50 443.1 K3

Module designation LED-0800/830

Colour temperature 3000 K

Colour rendering index CRI > 80

Module luminous flux 2850 lm

Luminaire luminous flux 2445 lm

Luminaire luminous efficiency 125,4 lm/W

### 50 443.1 K4

Module designation LED-0800/840


Colour temperature 4000 K

Colour rendering index CRI > 80

Module luminous flux 2920 lm

Luminaire luminous flux 2505 lm

Luminaire luminous efficiency 128,5 lm/W

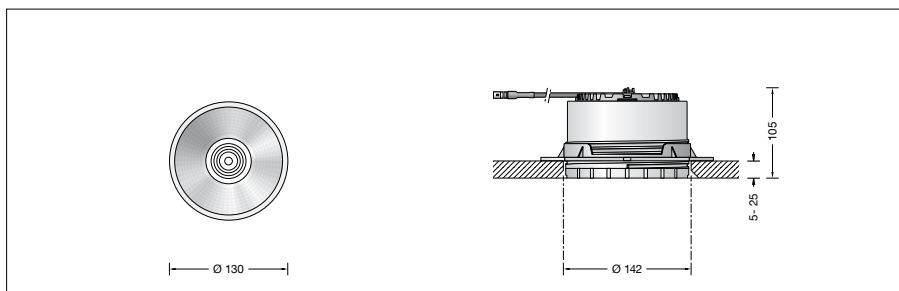

### Accessories

Power supply units for LED luminaires  
220-240 V · 0/50-60 Hz with strain relief and plug connector system.

**13 145** Power supply unit on/off

**13 171** Power supply unit DALI

The power supply units are only suitable for the operation of one LED luminaire.

For the accessories a separate instructions for use can be provided upon request.

### Article No. 50 443.1

LED colour temperature optionally 3000 K or 4000 K

3000 K – Article number + **K3**

4000 K – Article number + **K4**