

BEGA**50 485.1**

Ceiling luminaire · downlight for indoor use



Project · Reference number


Date

Product data sheet

Application

LED ceiling luminaire downlight · indoor
luminaire with asymmetrical light distribution.

Product description

Ceiling luminaire downlight »GENIUS«
Die-cast aluminium housing,
Velvet white enamel finish
Trim ring · Chrome finish
Matt safety glass
Light-diffusing silicone lens
Reflector surface made of pure aluminium
2 mounting holes \varnothing 4.5 mm
Distance apart 153 mm
Connecting terminals 2.5[□]
Earth conductor connection
LED power supply unit
220-240 V \sim 0/50-60 Hz
DC 170-280 V
DALI controllable
A basic isolation exists between power cable
and control line
Safety class I
Impact strength IK08
Protection against mechanical
impacts < 5 joule
 – Safety mark
CE – Conformity mark
Weight: 2.1 kg

Inrush current

Inrush current: 5 A / 50 μ s
Maximum number of luminaires of this
type per miniature circuit breaker:
B 10A: 31 luminaires
B 16A: 50 luminaires
C 10A: 52 luminaires
C 16A: 85 luminaires

Lamp


Module connected wattage	17 W
Luminaire connected wattage	20 W
Rated temperature	$t_a = 25$ °C
Ambient temperature	$t_{a \max} = 40$ °C

50 485.1 K3

Module designation	LED-0785/930
Colour temperature	3000 K
Colour rendering index	CRI >90
Module luminous flux	2655 lm
Luminaire luminous flux	2077 lm
Luminaire luminous efficiency	103,8 lm/W

50 485.1 K4

Module designation	LED-0785/940
Colour temperature	4000 K
Colour rendering index	CRI >90
Module luminous flux	2695 lm
Luminaire luminous flux	2108 lm
Luminaire luminous efficiency	105,4 lm/W

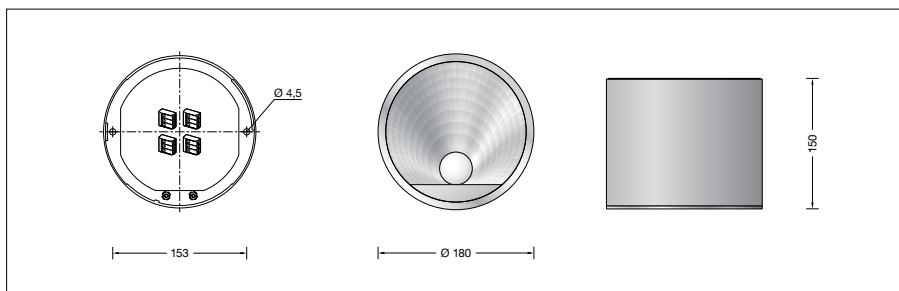

Service life of the LED

Ambient temperature $t_a = 25$ °C
– at 380,000h: L70B50

max. ambient temperature $t_a = 40$ °C
– at 310,000h: L70B50

Lighting technology

Symmetrical narrow beam light distribution.
Half beam angle 65/68°
Luminaire data for the light planning program
DIALux for outdoor lighting, street lighting and
indoor lighting, as well as luminaire data in
EULUMDAT and IES format are available on the
BEGA website at www.bega.com.

Article No. 50 485.1

LED colour temperature optionally 3000 K
or 4000 K
3000 K – Article number + **K3**
4000 K – Article number + **K4**

Optional finishes

- Velvet white enamel finish Code number **.1**
- Velvet black enamel finish Code number **.5**