

Project · Reference number

Date



Product data sheet

Application

Ceiling and wall luminaire · indoor luminaire made of hand-blown opal glass, satin matt and aluminium alloy housing, for all lighting tasks. They are ideal for places where a soft and uniform lighting distribution is required. Luminaire with a high protection class.

Product description

Luminaire made of aluminium alloy and stainless steel, finish white enamel
 Hand-blown opal glass, satin matt
 2 mounting holes \varnothing 5 mm
 Distance apart 142 mm
 1 cable entry for mains supply cable up to \varnothing 10,5 mm max. $3 \times 1,5^{\square}$
 Connecting terminal 2.5^{\square}
 Earth conductor connection
 LED-Module for mains voltage
 220-230 V \sim 50/60 Hz
 Safety class I
 Protection class IP 44
 Protected against granular foreign bodies > 1 mm and splash water
CE – Conformity mark
 Weight: 2.5 kg

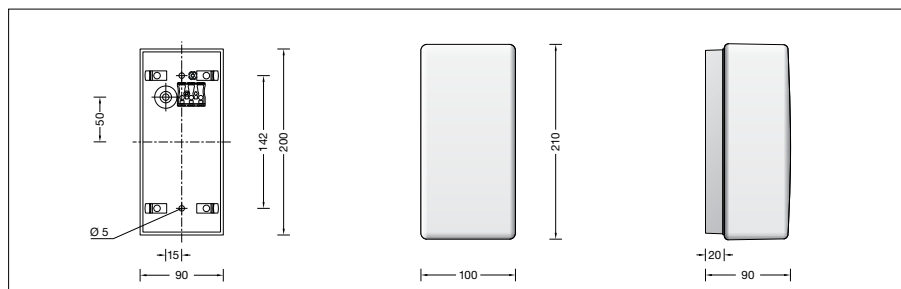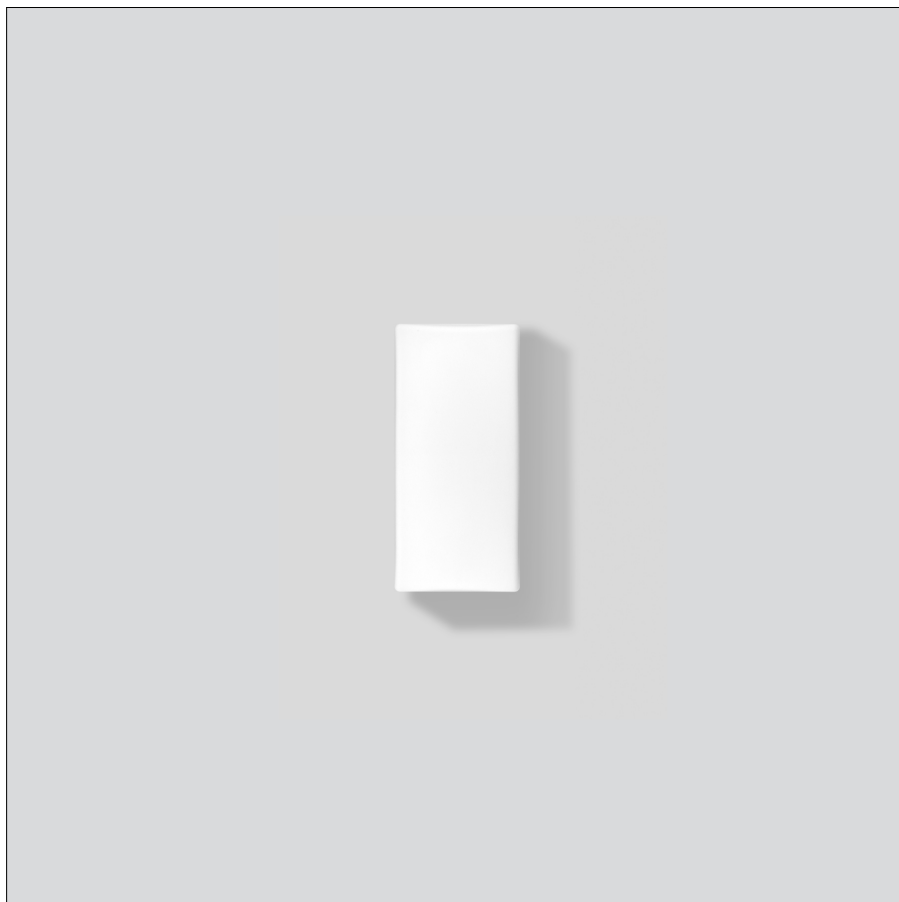

Lamp

Luminaire connected wattage
 Rated temperature
 Ambient temperature
 Service life criteria

8 W
 $t_a = 25 \text{ }^{\circ}\text{C}$
 $t_{a \text{ max}} = 45 \text{ }^{\circ}\text{C}$
 50 000 h / L_{70}

50 495 K3

Module designation LED-0662/830
 Colour temperature 3000 K
 Colour rendering index $R_a > 80$
 Module luminous flux 760 lm
 Luminaire luminous flux 591 lm
 Luminaire luminous efficiency 73,9 lm/W

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.