

BEGA**50 515.2**

Ceiling luminaire · downlight for indoor use



Project · Reference number



Date

Product data sheet

Application

LED ceiling luminaire downlight · indoor luminaire with wide beam light distribution.

Product description

Aluminium alloy housing,
stainless steel finish
Crystal glass, partially satin matt,
with screw neck
Reflector made of pure anodised aluminium
2 mounting holes \varnothing 4.5 mm
Distance apart 153 mm
The luminaire is suitable for through-wiring.
Connecting terminals 2.5[□]
Earth conductor connection
LED power supply unit
220-240 V \sim 0/50-60 Hz
DALI controllable
A basic isolation exists between power cable
and control line
Safety class I
 – Safety mark
 – Conformity mark
Weight: 2.9 kg

Inrush current

Inrush current: 5 A / 50 μ s
Maximum number of luminaires of this
type per miniature circuit breaker:
B 10A: 31 luminaires
B 16A: 50 luminaires
C 10A: 52 luminaires
C 16A: 85 luminaires

Lamp

Module connected wattage 17 W
Luminaire connected wattage 20 W
Rated temperature $t_a = 25$ °C
Ambient temperature $t_{a \max} = 45$ °C

50 515.2 K3

Module designation LED-0785/930
Colour temperature 3000 K
Colour rendering index CRI > 90
Module luminous flux 2655 lm
Luminaire luminous flux 1654 lm
Luminaire luminous efficiency 82,7 lm/W

50 515.2 K4

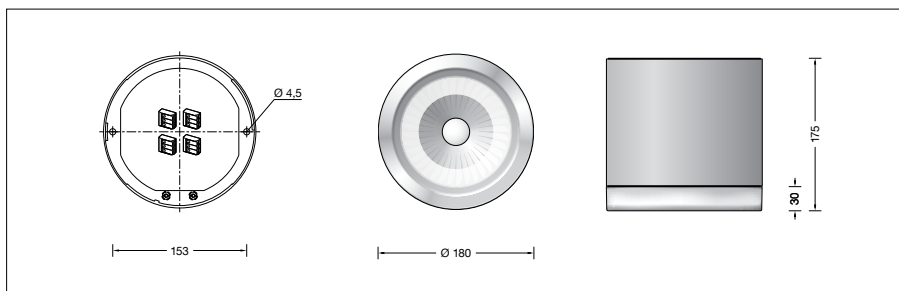
Module designation LED-0785/940
Colour temperature 4000 K
Colour rendering index CRI > 90
Module luminous flux 2695 lm
Luminaire luminous flux 1679 lm
Luminaire luminous efficiency 84 lm/W

Service life of the LED

Ambient temperature $t_a = 25$ °C
– at 390,000h: L70B50

max. ambient temperature $t_a = 45$ °C

– at 300,000h: L70B50

**Light technique**

Luminaire data for the light planning program
DIALux for outdoor lighting, street lighting and
indoor lighting as well as luminaire data in
EULUMDAT- and IES-format you will find on the
BEGA web page www.bega.com.

Article No. 50 515.2

LED colour temperature optionally 3000 K
or 4000 K
3000 K – Article number + **K3**
4000 K – Article number + **K4**

Optional finishes

- Velvet white enamel with code number **.1**
- Stainless steel with code number **.2**