

BEGA**50 577.4**

Recessed ceiling luminaire for indoor use



Project · Reference number


Date

Product data sheet

Application

LED recessed ceiling luminaire · indoor luminaire with symmetrical wide beam light distribution and a remote non-dimmable power supply unit. For installation in suspended ceilings of 5-30 mm in interior applications.

Product description

Recessed LED ceiling luminaire with a remote power supply unit
 Luminaire housing made of cast aluminium
 Ceiling frame ring,
 Enamel, velvet black
 Inside hue matt brass
 Fixing is achieved by using
 2 fastening springs
 Recessed opening \varnothing 141 mm
 Recessed depth required 90 mm
 Light-diffusing disc
 External LED power supply unit
 220-240 V \sim 0/50-60 Hz
 Safety class II 
CE – Conformity mark
 Weight: 0.52 kg

Light technique



Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Lamp

Module connected wattage	17.6 W
Luminaire connected wattage	20 W
Rated temperature	$t_a = 25\text{ }^\circ\text{C}$
Ambient temperature	$t_{a\text{ max}} = 30\text{ }^\circ\text{C}$

50 577.4 K3

Module designation	LED-0838/930
Colour temperature	3000 K
Colour rendering index	CRI > 90
Module luminous flux	2670 lm
Luminaire luminous flux	1135 lm
Luminaire luminous efficiency	56,8 lm/W

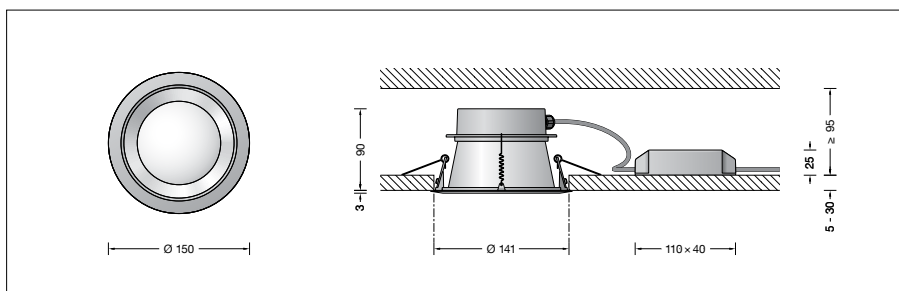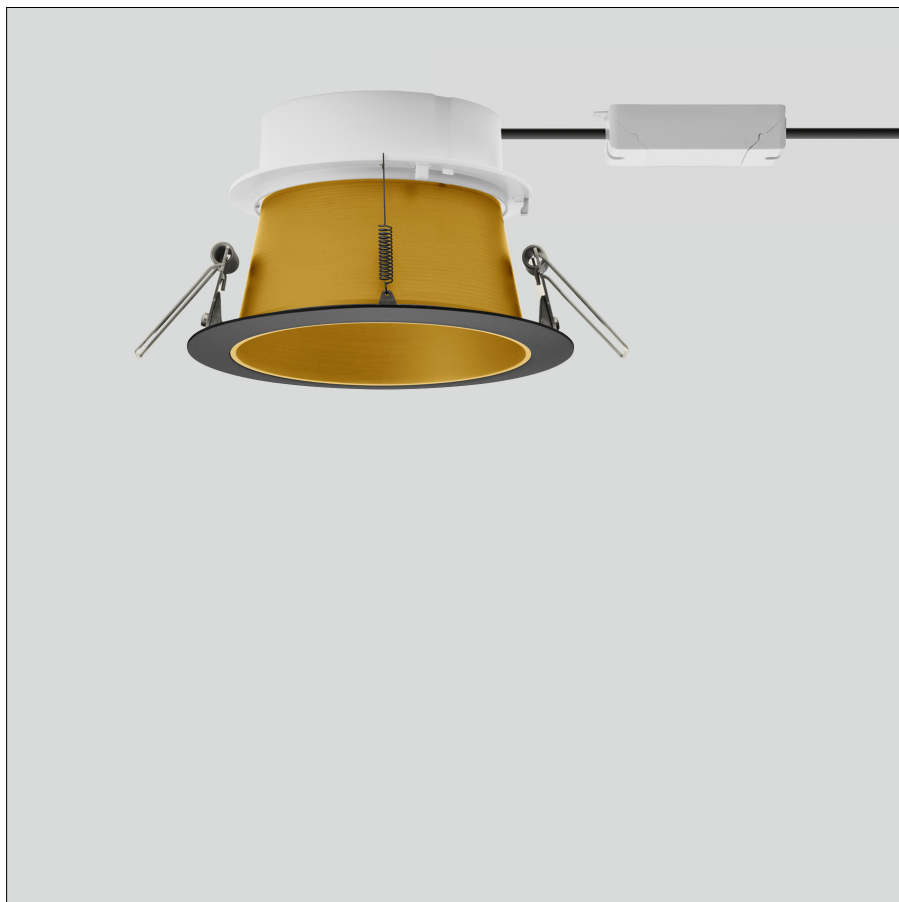

Service life · Ambient temperature

Rated temperature $t_a = 25\text{ }^\circ\text{C}$	
LED psu:	> 50,000 h
LED module:	100,000 h (L80B50)
Ambient temperature $t_{a\text{ max}} = 30\text{ }^\circ\text{C}$ (100 %)	
LED psu:	50,000 h
LED module:	100,000 h (L80B50)

Article No. 50 577.4

Interior colour options

- white
- matt aluminium
- matt brass
- matt copper

Code number .1
Code number .2
Code number .4
Code number .6