

BEGA**50 578.4**

Recessed ceiling luminaire for indoor use



Project · Reference number


Date

Product data sheet

Application

LED recessed ceiling luminaire · indoor luminaire with symmetrical wide beam light distribution and a remote non-dimmable power supply unit. For installation in suspended ceilings of 5-30 mm in interior applications.

Product description

Recessed LED ceiling luminaire with a remote power supply unit
 Luminaire housing made of cast aluminium
 Ceiling frame ring,
 Enamel, velvet white
 Inside hue matt brass
 Fixing is achieved by using
 2 fastening springs
 Recessed opening \varnothing 120 mm
 Recessed depth required 80 mm
 Light-diffusing disc
 External LED power supply unit
 220-240 V \sim 0/50-60 Hz
 Safety class II 
CE – Conformity mark
 Weight: 0.41 kg

Light technique



Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Lamp

Module connected wattage	10 W
Luminaire connected wattage	11.8 W
Rated temperature	$t_a = 25 \text{ }^\circ\text{C}$
Ambient temperature	$t_{a \text{ max}} = 45 \text{ }^\circ\text{C}$

50 578.4 K3

Module designation	LED-0859/930
Colour temperature	3000 K
Colour rendering index	CRI > 90
Module luminous flux	1355 lm
Luminaire luminous flux	604 lm
Luminaire luminous efficiency	51,2 lm/W

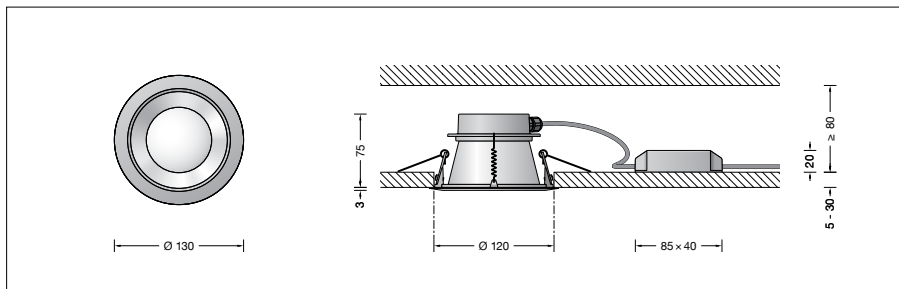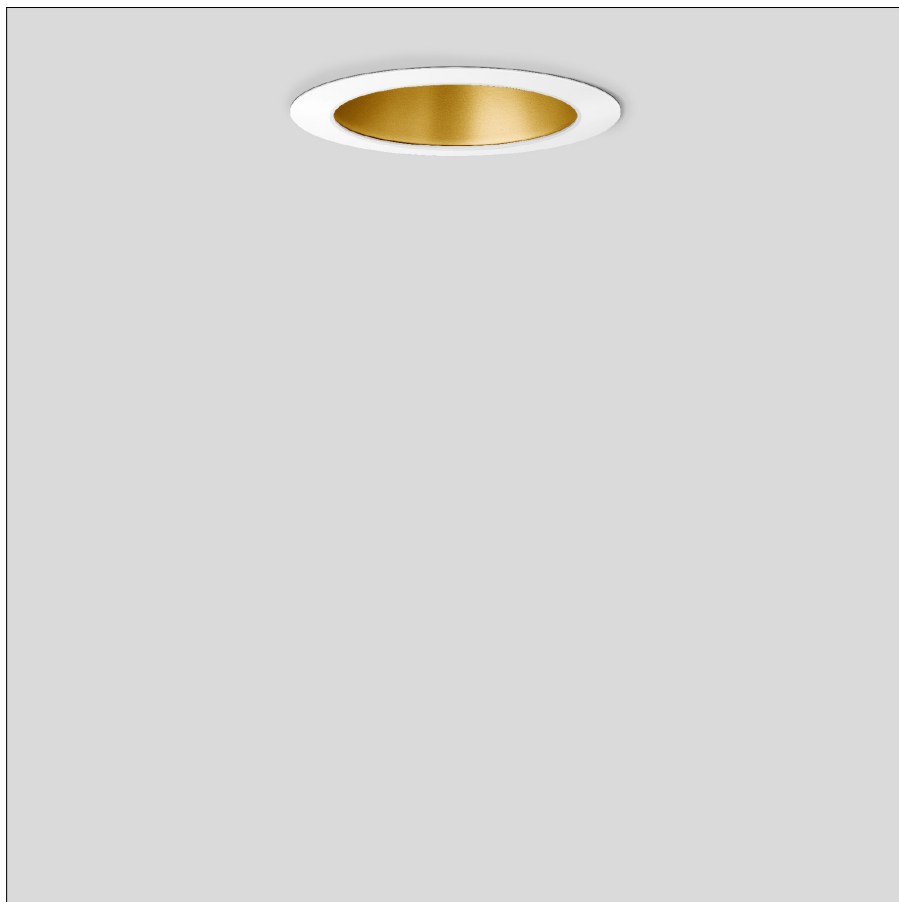

Service life · Ambient temperature

Ambient temperature $t_a = 25 \text{ }^\circ\text{C}$	
LED psu:	> 50,000 h
LED module:	110,000 h (L 80 B 50) 50,000 h (L 90 B 50)

Ambient temperature $t_a = 45 \text{ }^\circ\text{C}$	
LED psu:	50,000 h
LED module:	95,000 h (L 80 B 50) 50,000 h (L 80 B 50)

Article No. 50 578.4

Interior colour options

- white
- matt aluminium
- matt brass
- matt copper

Code number **.1**
 Code number **.2**
 Code number **.4**
 Code number **.6**