

BEGA**50 605.2**

Wall luminaire for indoor use

IP 44

Project · Reference number

Date

Product data sheet**Application**

Wall luminaire · indoor luminaire made of hand-blown opal glass, satin matt and aluminium housing, for all lighting tasks in interior applications.

They are ideal for places where a soft and uniform lighting distribution is required. Luminaire with a high protection class.

Product description

Luminaire made of aluminium,
finish stainless steel
Hand-blown opal glass, satin matt
2 mounting holes \varnothing 5.5 mm
Distance apart 350 mm
2 cable entries for through-wiring for mains
cable up to \varnothing 10.5 mm max. $3 \times 1.5^{\square}$
Connecting terminal 2.5^{\square}
Earth conductor connection
LED power supply unit
220-240 V \sim 0/50-60 Hz
DC 176-280 V
Safety class I
Protection class IP 44
Protected against granular foreign bodies
> 1 mm and splash water
CE – Conformity mark
Weight: 2.2 kg

Inrush current

Inrush current: 5 A / 50 μ s
Maximum number of luminaires of this
type per miniature circuit breaker:
B 10A: 31 luminaires
B 16A: 50 luminaires
C 10A: 52 luminaires
C 16A: 85 luminaires

Lamp

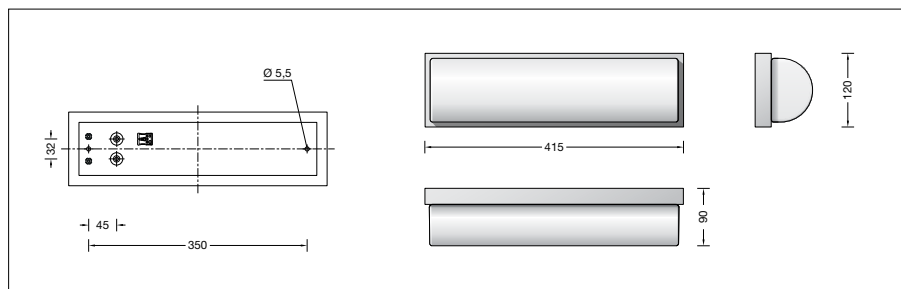
Module connected wattage	9.6 W
Luminaire connected wattage	11.5 W
Rated temperature	$t_a = 25^{\circ}\text{C}$
Ambient temperature	$t_{a\text{max}} = 40^{\circ}\text{C}$

50 605.2 K3

Module designation	2x LED-0345/930
Colour temperature	3000 K
Colour rendering index	CRI > 90
Module luminous flux	1550 lm
Luminaire luminous flux	961 lm
Luminaire luminous efficiency	83,6 lm/W

50 605.2 K4

Module designation	2x LED-0345/940
Colour temperature	4000 K
Colour rendering index	CRI > 90
Module luminous flux	1600 lm
Luminaire luminous flux	992 lm
Luminaire luminous efficiency	86,3 lm/W

**Lifetime of the LED**

Ambient temperature $t_a = 15^{\circ}\text{C}$
– at 50,000h: L90 B10
– at > 500,000h: L70 B50

Ambient temperature $t_a = 25^{\circ}\text{C}$
– at 50,000h: L90 B10
– at > 500,000h: L70 B50

max. ambient temperature $t_a = 40^{\circ}\text{C}$
– at 50,000h: L80 B10
– at 264,000h: L70 B50

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Article No. 50 605.2

LED colour temperature optionally 3000 K or 4000 K
3000 K – Article number + **K3**
4000 K – Article number + **K4**