

BEGA**50 638.2**

Pendant luminaire for indoor use

Project · Reference number

Date

Product data sheet

Application

LED Pendant luminaire · indoor luminaire with hand-blown opal glass, satin matt and reflector for directed light to provide a high horizontal illuminance.

Product description

Luminaire made of aluminium alloy
stainless steel finish
Hand-blown opal glass,
satin matt, with screw neck
Reflector made of pure anodised aluminium
Black flex suspension 3×0.75 □
Overall length of luminaire approx. 2000 mm
Connection terminal 2.5 □
Earth conductor connection
LED power supply unit
220-240 V \approx 0/50-60 Hz
DC 176-280 V
Safety class I
CE – Conformity mark
Weight: 1.4 kg

Inrush current

Inrush current: 5 A / 50 μ s
Maximum number of luminaires of this type per miniature circuit breaker:
B10A: 31 luminaires
B16A: 50 luminaires
C10A: 52 luminaires
C16A: 85 luminaires

Lighting technology

Half beam angle 51°
Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and interior lighting as well as luminaire data in EULUMDAT and IES format are available on our website www.bega.com.

Lamp

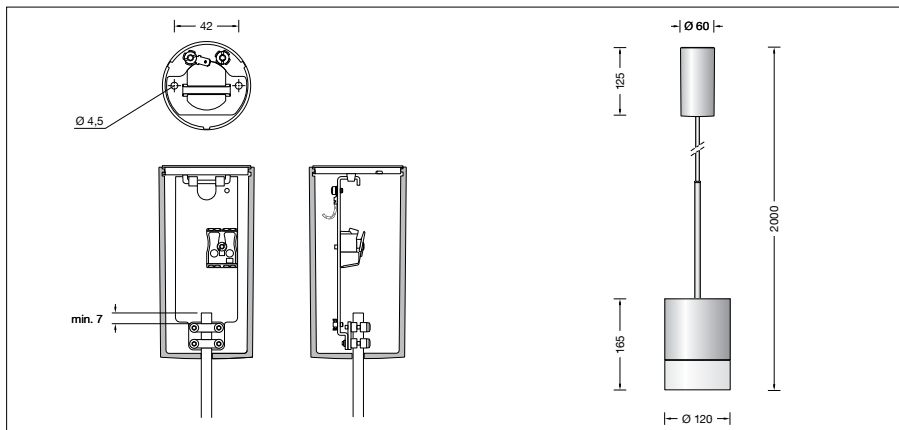
Module connected wattage	8.1 W
Luminaire connected wattage	9.8 W
Rated temperature	$t_a = 25$ °C
Ambient temperature	$t_{a \max} = 35$ °C

50 638.2 K3

Module designation	LED-0800/930
Colour temperature	3000 K
Colour rendering index	CRI > 90
Module luminous flux	1255 lm
Luminaire luminous flux	916 lm
Luminaire luminous efficiency	93,5 lm/W

50 638.2 K4

Module designation	LED-0800/940
Colour temperature	4000 K
Colour rendering index	CRI > 90
Module luminous flux	1275 lm
Luminaire luminous flux	930 lm
Luminaire luminous efficiency	94,9 lm/W

**Service life of the LED**

Ambient temperature $t_a = 25$ °C
– at 400,000h: L70B50
max. ambient temperature $t_a = 35$ °C
– at 350,000h: L70B50

Article No. 50 638.2

LED colour temperature optionally 3000 K or 4000 K
3000 K – Article number + **K3**
4000 K – Article number + **K4**

Finish options

- Enamel, velvet white Code number **.1**
- Stainless steel Code number **.2**
- Enamel, velvet black Code number **.5**