

BEGA**50 654.1**

Ceiling and wall luminaire for indoor use

IP 44

Project · Reference number

Date

Product data sheet**Application**

Ceiling and wall luminaire · indoor luminaire made of hand-blown opal glass, satin matt and metal housing, for all lighting tasks. They are ideal for places where a soft and uniform lighting distribution is required.

Product description

Metal housing,
finish white enamel
Hand-blown opal glass, satin matt,
with sliding-bolt closure
2 mounting holes \varnothing 5.5 mm
Distance apart 240 mm
2 cable entries for through-wiring for mains
cable up to \varnothing 10.5 mm max. $3 \times 1.5^{\square}$
Connecting terminal 2.5^{\square}
with plug connection
Earth conductor connection
LED power supply unit
220-240 V \sim 0/50-60 Hz
DC 170-280 V
Safety class I
Protection class IP 44
Protected against granular foreign bodies
> 1 mm and splash water
CE – Conformity mark
Weight: 4.4 kg

Lamp

Module connected wattage	25.9 W
Luminaire connected wattage	30 W
Rated temperature	$t_a = 25^{\circ}\text{C}$
Ambient temperature	$t_{a\text{max}} = 40^{\circ}\text{C}$

50 654.1 K3

Module designation	LED-0570/930
Colour temperature	3000 K
Colour rendering index	CRI > 90
Module luminous flux	3080 lm
Luminaire luminous flux	1928 lm
Luminaire luminous efficiency	64,3 lm/W

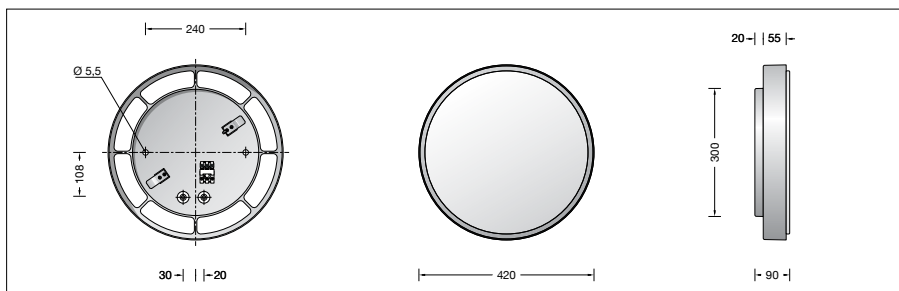
50 654.1 K4

Module designation	LED-0570/940
Colour temperature	4000 K
Colour rendering index	CRI > 90
Module luminous flux	3190 lm
Luminaire luminous flux	1996 lm
Luminaire luminous efficiency	66,5 lm/W

Service life of the LED

Ambient temperature $t_a = 25^{\circ}\text{C}$
– at 114,000h: L70B50

max. ambient temperature $t_a = 40^{\circ}\text{C}$
– at 50,000h: L70B50

**Light technique**

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Article No. 50 654.1

LED colour temperature optionally 3000 K or 4000 K
3000 K – Article number + **K3**
4000 K – Article number + **K4**

Finish options

- Enamel, white Code number **.1**
- Enamel, white aluminium Code number **.2**

If the article number is followed by a **P**, we can also supply these luminaires in impact-resistant synthetic material.