

BEGA**50 711.2**

Recessed ceiling luminaire for indoor use



Project · Reference number


Date

Product data sheet

Application

Recessed LED-ceiling luminaire · indoor
luminaire partially satin matt crystal glass inside
and aluminium alloy housing.
For installation into ceilings with a shallow
depth in interior areas.

Product description

Recessed ceiling luminaire »ACCENTA«
Die-cast aluminium housing
Crystal glass, partially satin matt inside
Reflector of anodised pure aluminium
Ceiling frame ring made of stainless steel
Recessed opening \varnothing 68 mm
Recessed depth required 60 mm
Fixing is achieved by using 2 adjustable
wedge-shaped claws
Connecting terminal for digital control
External LED power supply unit
220-240 V \sim 0/50-60 Hz
DALI controllable
A basic isolation exists between power cable
and control line
Safety class II 
CE – Conformity mark
Weight: 0.4 kg

Light technique

Luminaire data for the light planning program
DIALux for outdoor lighting, street lighting and
indoor lighting as well as luminaire data in
EULUMDAT- and IES-format you will find on the
BEGA web page www.bega.com.

Lamp

Module connected wattage	8.5 W
Luminaire connected wattage	10.2 W
Rated temperature	$t_a = 25 \text{ }^\circ\text{C}$
Ambient temperature	$t_{a \text{ max}} = 30 \text{ }^\circ\text{C}$


50 711.2 K3

Module designation	LED-0923/930
Colour temperature	3000 K
Colour rendering index	CRI > 90
Module luminous flux	1200 lm
Luminaire luminous flux*	640 lm
Luminaire luminous efficiency*	62,7 lm/W

50 711.2 K2

Module designation	LED-0923/927
Colour temperature	2700 K
Colour rendering index	CRI > 90
Module luminous flux	1155 lm
Luminaire luminous flux*	616 lm
Luminaire luminous efficiency*	60,4 lm/W

* preliminary data

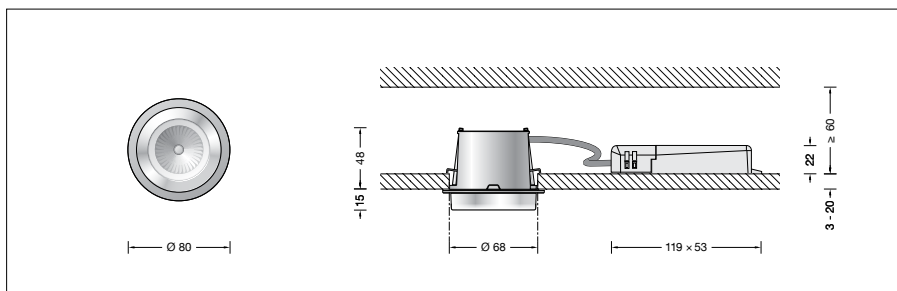

Service life of the LED

Ambient temperature $t_a = 25 \text{ }^\circ\text{C}$
– at 200,000h: L70B50
max. ambient temperature $t_a = 30 \text{ }^\circ\text{C}$
– at 180,000h: L70B50

Article No. 50 711.2

Colour temperature 3000 K.
Also available with 2700 K on request.
3000 K – article number + **K3**
2700 K – article number + **K2**

Trim ring optionally available in:

- Metal, white Code number **.1**
- Stainless steel Code number **.2**
- Polished stainless steel Code number **.3**
- Brass Code number **.4**