

BEGA**50 740.2**

Pendant luminaire for indoor use

Project · Reference number

Date

Product data sheet

Application

LED pendant luminaire · indoor luminaire
with impact resistant synthetic diffuser and
metal housing for light deflected upwards and
downwards.

Product description

LED pendant luminaire »STUDIO LINE«
Aluminium housing shield,
velvet black enamel finish,
Inside hue matt aluminium
Impact resistant synthetic diffuser, white
Light distribution separately controllable
Mounting plate with 2 fixing
holes \varnothing 6 mm · 356 mm spacing
Black flex suspension $5 \times 0,75$ □
Steel wire suspension
Overall length of luminaire approx. 2950 mm
Connection terminal 2.5 □
Earth conductor connection
LED power supply unit
220-240 V \sim 0/50-60 Hz
DALI controllable
A basic isolation exists between power cable
and control line
Safety class I
CE – Conformity mark
Weight: 8.0 kg

Inrush current

Inrush current: 35 A / 400 μ s
Maximum number of luminaires of this
type per miniature circuit breaker:
B 10A: 4 luminaires
B 16A: 7 luminaires
C 10A: 8 luminaires
C 16A: 12 luminaires

Light technique

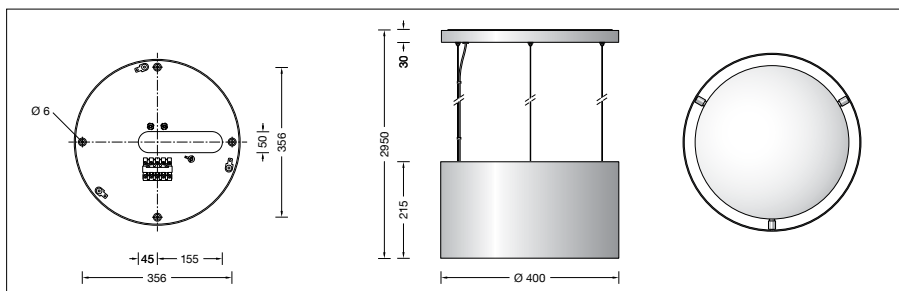
Luminaire data for the light planning program
DIALux for outdoor lighting, street lighting and
indoor lighting as well as luminaire data in
EULUMDAT- and IES-format you will find on the
BEGA web page www.bega.com.

Lamp

| | |
|-----------------------------|----------------------|
| Module connected wattage | 2x 26.9 W |
| Luminaire connected wattage | 60 W |
| Rated temperature | $t_a = 25$ °C |
| Ambient temperature | $t_{a \max} = 35$ °C |

50 740.2 K3

| | |
|-------------------------------|-----------------|
| Module designation | 2x LED-0510/930 |
| Colour temperature | 3000 K |
| Colour rendering index | CRI > 90 |
| Module luminous flux | 6770 lm |
| Luminaire luminous flux | 4663 lm |
| Luminaire luminous efficiency | 77,7 lm/W |

**Service life · Ambient temperature**

| | |
|--|--|
| Rated temperature $t_a = 25$ °C | |
| LED psu: | > 50,000 h |
| LED module: | 67,000 h (L 80 B 50) |
| Ambient temperature $t_{a \max} = 35$ °C (100 %) | |
| LED psu: | 50,000 h |
| LED module: | 38,000 h (L 80 B 50) 50,000 h (L 70 B 50) |

Article No. 50 740.2

Interior colour options

- matt aluminium
- matt brass
- matt copper

Code number **.2**
Code number **.4**
Code number **.6**