

BEGA**50 745.2**

Pendant luminaire for indoor use

Project · Reference number

Date

Product data sheet

Application

LED Pendant luminaire downlight · indoor
luminaire with aluminium housing for non-glare
light deflected downwards.

Product description

LED Pendant luminaire downlight »STUDIO LINE«
Aluminium luminaire housing,
velvet black enamel finish,
Inside hue matt aluminium
Trim ring · Chrome finish
Light-diffusing silicone lens
Reflector made of pure anodised aluminium
Black flex suspension $5 \times 0,75$ □
with 1 steel messenger wire
Overall length of luminaire approx. 3000 mm
Connection terminal 2.5 □
Earth conductor connection
Connecting terminal for digital control
LED power supply unit
220-240 V \sim 0/50-60 Hz
DALI controllable
A basic isolation exists between power cable
and control line
Safety class I
CE – Conformity mark
Weight: 1.9 kg

Inrush current

Inrush current: 5 A / 50 μ s
Maximum number of luminaires of this
type per miniature circuit breaker:
B 10A: 31 luminaires
B 16A: 50 luminaires
C 10A: 52 luminaires
C 16A: 85 luminaires

Lamp

Module connected wattage	11.5 W
Luminaire connected wattage	13.7 W
Rated temperature	$t_a = 25$ °C
Ambient temperature	$t_{a \max} = 30$ °C

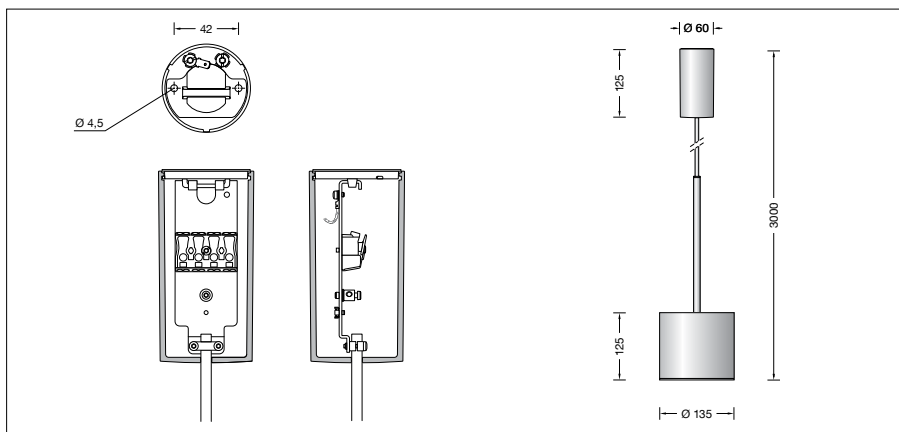
50 745.2 K3

Module designation	LED-0800/930
Colour temperature	3000 K
Colour rendering index	CRI > 90
Module luminous flux	1735 lm
Luminaire luminous flux	1218 lm
Luminaire luminous efficiency	88,9 lm/W

Service life of the LED

Ambient temperature $t_a = 25$ °C
– at 400,000h: L70B50

max. ambient temperature $t_a = 30$ °C
– at 370,000h: L70B50

**Lighting technology**

Half beam angle 32°
Luminaire data for the light planning program
DIALux for outdoor lighting, street lighting and
indoor lighting, as well as luminaire data in
EULUMDAT and IES format are available on the
BEGA website at www.bega.com.

Article No. 50 745.2

Interior colour options
• matt aluminium
• matt brass
• matt copper

Code number **.2**
Code number **.4**
Code number **.6**