

**BEGA****55 453**

Wall luminaire



Project · Reference number

Date

## Product data sheet

### Application

Wall luminaire for many lighting tasks on or in buildings.  
Ideal for places where a soft and uniform light distribution is required.

### Product description

Luminaire made of aluminium alloy and stainless steel  
BEGA Unidure® coating technology  
Opal glass  
2 mounting holes  $\varnothing$  5.2 mm  
Distance apart 70 mm  
1 cable entry for mains supply cable up to  $\varnothing$  10,5 mm max.  $3 \times 1,5$ <sup>□</sup>  
Connecting terminal 2.5<sup>□</sup> with plug connection  
Earth conductor connection  
Lampholder E 27  
Safety class I  
Protection class IP 44  
Protected against granular foreign bodies > 1 mm and splash water  
Impact strength IK02  
Protection against mechanical impacts < 0.2 joule  
 – Safety mark  
**CE** – Conformity mark  
Weight: 1.4 kg

### Lamp

Luminaire with lampholder E 27  
Lamp output max. 75 W

For this luminaire we recommend the following BEGA LED lamps:

**13510** LED 7 W · 805 lm · 2700 K

**13548** LED 7 W · 805 lm · 2700 K  
dimnable


**13584** LED 7 W · 805 lm · 3000 K

**13586** LED 7 W · 805 lm · 3000 K  
dimnable

**13512** LED 8 W · 1055 lm · 2700 K

**13588** LED 8 W · 1055 lm · 3000 K

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

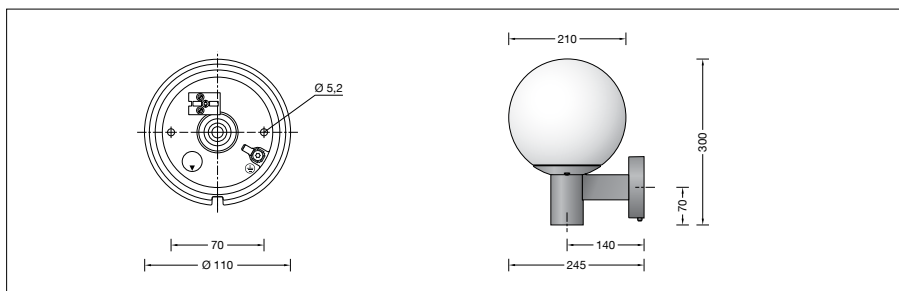

### Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page [www.bega.com](http://www.bega.com).

### Accessory

**10409** Corner block  
Corner block for installation of wall lights on a house corner.

A separate instructions for use can be provided upon request.