

**BEGA****56 538.2**

Pendant luminaire for indoor use



Project · Reference number

Date

## Product data sheet

**Application**

LED Pendant luminaire · indoor luminaire with partially satin matt crystal glass and reflector for directed light to provide a high horizontal illuminance.

Metal luminaire housing and canopy.

**Product description**

Die-cast aluminium housing and metal canopy, stainless steel finish

Crystal glass, partially satin matt, with screw neck

Reflector made of pure anodised aluminium

Transparent flex suspension  $3 \times 0,75$  □


Overall length of luminaire approx. 1500 mm

Connecting terminals and earth conductor terminal 2,5 □

LED power supply unit

100-240 V ~ 50/60 Hz

Safety class I

 – Safety mark

**CE** – Conformity mark

Weight: 1.0 kg

**Inrush current**

Inrush current: 20 A / 170 μs

Maximum number of luminaires of this type per miniature circuit breaker:

B 10A: 31 luminaires

B 16A: 50 luminaires

C 10A: 52 luminaires

C 16A: 85 luminaires

**Lamp**

Module connected wattage 3.2 W

Luminaire connected wattage 4.8 W

Rated temperature  $t_a = 25$  °C

Ambient temperature  $t_{a \max} = 45$  °C

**56 538.2 K3**

Module designation LED-0648/930

Colour temperature 3000 K

Colour rendering index CRI > 90

Module luminous flux 390 lm

Luminaire luminous flux 178 lm

Luminaire luminous efficiency 37,1 lm/W

**56 538.2 K4**

Module designation LED-0648/940

Colour temperature 4000 K

Colour rendering index CRI > 90

Module luminous flux 400 lm

Luminaire luminous flux 182 lm

Luminaire luminous efficiency 37,9 lm/W

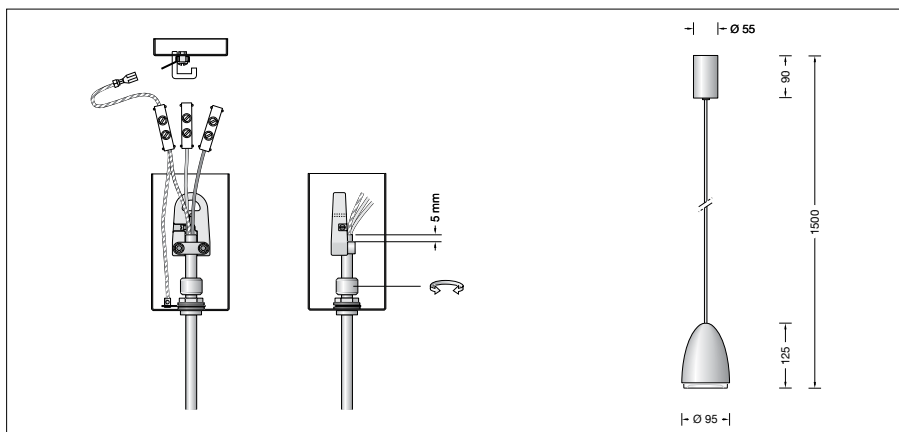
**Lifetime of the LED**

Ambient temperature  $t_a = 25$  °C

– at 350,000h: L70B50

max. ambient temperature  $t_a = 45$  °C

– at 275,000h: L70B50

**Article No. 56 538.2**

LED colour temperature optionally 3000K

or 4000K

3000 K – Article number + **K3**

4000 K – Article number + **K4**

Optional finishes

- White enamel code number **.1**
- Stainless steel code number **.2**
- Chrome code number **.3**