

BEGA**56 601.2**

Pendant luminaire for indoor use



Project · Reference number

Date

Product data sheet

Application

Pendant luminaire for indoor use.
For freeradiating and uniform light made of hand-blown opal glass, satin matt.
Metal luminaire housing and rod.

Product description

Luminaire housing, rod suspension and canopy made of metal, stainless steel finish
Hand-blown opal glass, satin matt
Diameter of rod 13 mm
Overall length of luminaire approx. 1950 mm
Connection terminal 2.5²
Earth conductor connection
LED power supply unit inside canopy
220-240 V \sim 0/50-60 Hz
DALI controllable
A basic isolation exists between power cable and control line
Safety class I
 – Safety mark
CE – Conformity mark
Weight: 7.3 kg

Inrush current

Inrush current: 10 A / 200 μ s
Maximum number of luminaires of this type per miniature circuit breaker:
B10A: 18 luminaires
B16A: 30 luminaires
C10A: 31 luminaires
C16A: 51 luminaires

Lamp

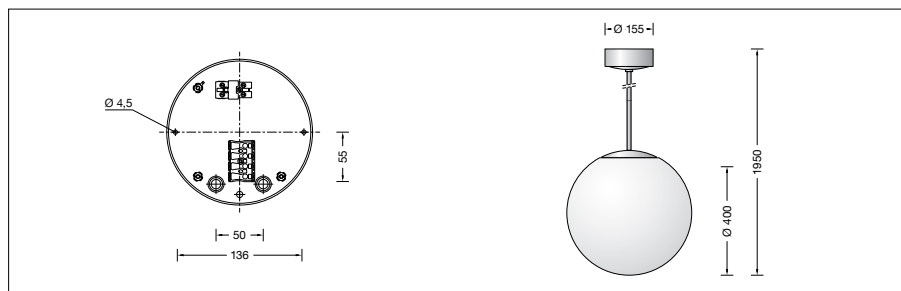
Module connected wattage	35.1 W
Luminaire connected wattage	40 W
Rated temperature	$t_a = 25$ °C
Ambient temperature	$t_{a \max} = 45$ °C

56 601.2 K3

Module designation	LED-0523/930
Colour temperature	3000 K
Colour rendering index	CRI > 90
Module luminous flux	4895 lm
Luminaire luminous flux	3543 lm
Luminaire luminous efficiency	88,6 lm/W

56 601.2 K4

Module designation	LED-0523/940
Colour temperature	4000 K
Colour rendering index	CRI > 90
Module luminous flux	5105 lm
Luminaire luminous flux	3695 lm
Luminaire luminous efficiency	92,4 lm/W

**Service life of the LED**

Ambient temperature $t_a = 25$ °C
– at 190,000h: L70B50
max. ambient temperature $t_a = 45$ °C
– at 120,000h: L70B50

Article No. 56 601.2

LED colour temperature optionally 3000 K or 4000 K
3000 K – Article number + **K3**
4000 K – Article number + **K4**

Optional finishes

- White enamel code number **.1**
- Stainless steel code number **.2**
- Chrome code number **.3**
- Brass code number **.4**

If the article number is followed by a **P**, we can also supply these luminaires in impact-resistant synthetic material.