

**BEGA****66 491**

Wall luminaire



Project · Reference number

Date

## Product data sheet

### Application

Wall luminaire with shielded light source and opal glass.

A luminaire shielded to the top for a host of lighting applications.

### Product description

Luminaire made of aluminium alloy, aluminium and stainless steel  
 BEGA Unidure® coating technology  
 Opal glass with screw neck  
 2 mounting holes  $\varnothing$  5.2 mm  
 Distance apart 70 mm  
 1 cable entry for mains supply cable up to  $\varnothing$  10,5 mm max.  $3 \times 1,5$ □  
 Connecting terminal 2.5□

with plug connection  
 Earth conductor connection

Lampholder E 27

Safety class I

Protection class IP 44

Protected against granular foreign bodies > 1 mm and splash water

Impact strength IK05

Protection against mechanical impacts < 0.7 joule

– Safety mark

**CE** – Conformity mark

Weight: 2.1 kg

### Lamp

Luminaire with lampholder E 27

Lamp output max. 60 W

For this luminaire we recommend the following BEGA LED lamps:


**13510** LED 7 W · 805 lm · 2700 K

**13548** LED 7 W · 805 lm · 2700 K  
 dimmable

**13584** LED 7 W · 805 lm · 3000 K

**13586** LED 7 W · 805 lm · 3000 K  
 dimmable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

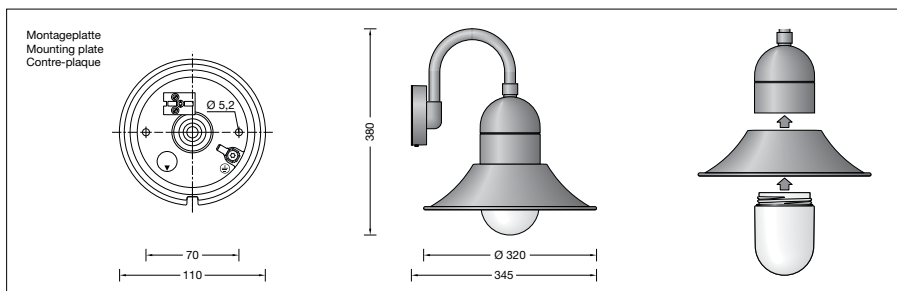

### Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page [www.bega.com](http://www.bega.com).

### Accessory

**10409** Corner block  
 Corner block for installation of wall lights on a house corner.

A separate instructions for use can be provided upon request.