

**BEGA****66 860**

Lichtbaustein ®



Project · Reference number

Date

## Product data sheet

### Application

**Lichtbaustein®** Rectangle  
Wall luminaire for corner mounting.  
The luminaire is ideal for places where a soft  
and uniform lighting distribution is required.  
For interior and exterior applications.

### Product description

Luminaire made of aluminium alloy  
and stainless steel  
BEGA Unidure® coating technology  
Opal glass satin matt  
1 fixing hole  $\varnothing$  7 mm  
1 cable entry for mains supply cable  
up to  $\varnothing$  10,5 mm max.  $3 \times 1,5^{\square}$   
Lampholder terminal  $2.5^{\square}$   
Earth conductor connection  
Lampholder E 27  
Safety class I  
Protection class IP 44  
Protected against granular foreign bodies  
> 1 mm and splash water  
 – Safety mark  
**CE** – Conformity mark  
Weight: 0.8 kg

### Lamp



Luminaire with lampholder E 27  
Lamp output max. 75 W

For this luminaire we recommend the following  
BEGA LED lamps:

**13512** LED 8 W · 1055 lm · 2700 K

**13588** LED 8 W · 1055 lm · 3000 K

Detailed technical and lighting data for the  
lamps can be found in the data sheets on our  
website.

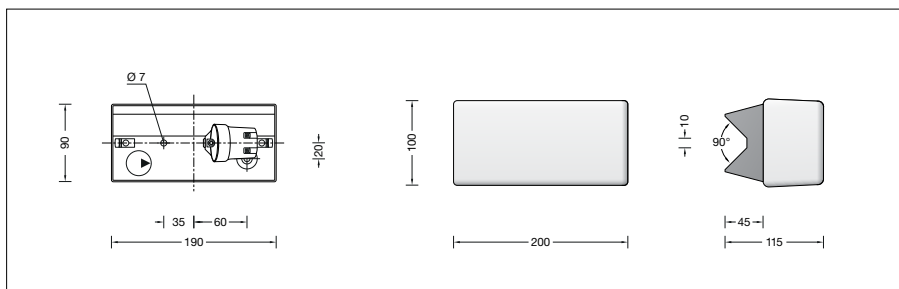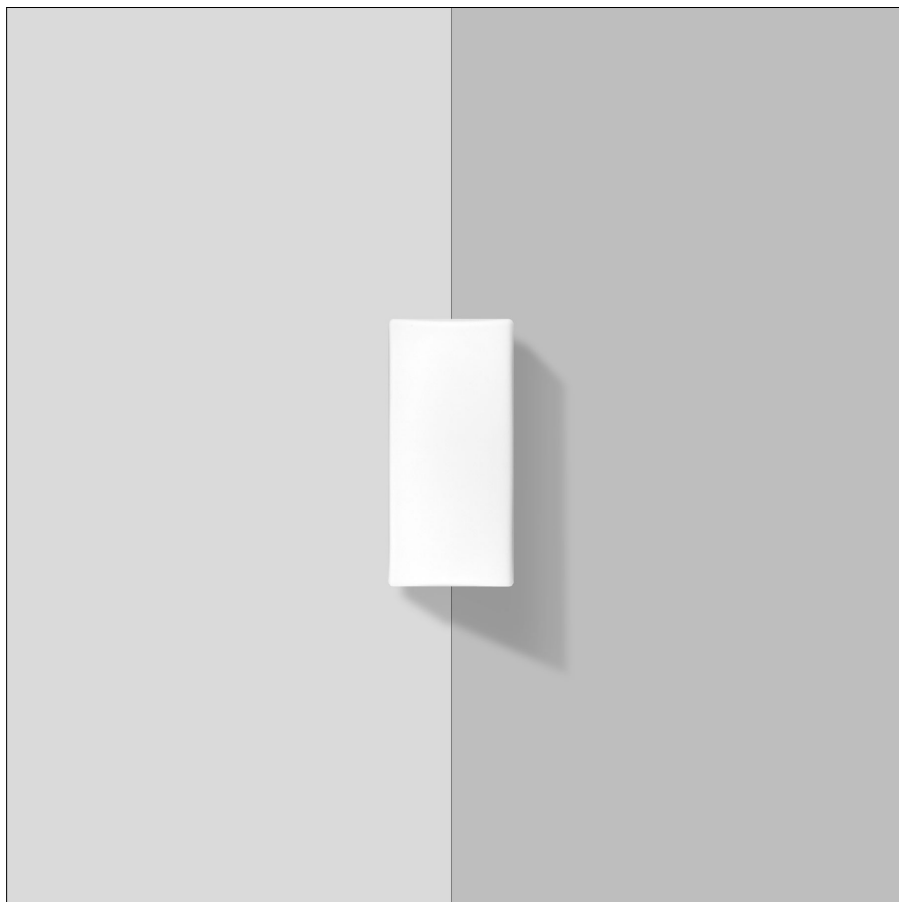

### Light technique

Luminaire data for the light planning program  
DIALux for outdoor lighting, street lighting and  
indoor lighting as well as luminaire data in  
EULUMDAT- and IES-format you will find on the  
BEGA web page [www.bega.com](http://www.bega.com).

### Light distribution

